

# TRUCK & BUS TIRE CATALOGUE



REV 23.01

Roadx Headquarters  
No. 43 Zhengzhou Road, Qingdao, China

# TABLE OF CONTENTS

## LONG HAUL

## REGIONAL

## ON & OFF ROAD

## OFF ROAD

## URBAN

## WINTER

STEER/ALL POSITION



**ST350** —P03  
**ST351** —P04  
**ST355R<sup>3</sup>** —P05



**RH631** —P06



**RH300** —P13  
**RH618** —P14  
**RH620** —P15  
**RH620ST** —P16  
**RH621** —P17  
**RH621+** —P19  
**RH622** —P20  
**RH630** —P21  
**RH632** —P22



**RH632A** —P23  
**RH636** —P24  
**RH638L** —P25  
**RH642** —P26  
**RH644** —P27  
**RH646** —P28  
**RH648** —P29  
**RH648R<sup>3</sup>** —P30  
**RH649** —P31



**RH697** —P32  
**AP351** —P33  
**AP838L** —P34



**AP125** —P47  
**AP826** —P48  
**AP851** —P49  
**AP856** —P50  
**AP861** —P51  
**AP862** —P52



**AP865** —P53  
**AP866** —P55  
**AP866A** —P57  
**AP867** —P58  
**AP868** —P59  
**AP869** —P60



**AP886** —P61



**DT980** —P79  
**DT989** —P80  
**DT990** A—P81  
**DT990** B—P81  
**DT991** —P83



**DT993** —P84  
**DT997** —P85  
**DT998** —P86  
**DT999** —P87



**RU650** —P89



**WP806** —P91



**RU651** —P90

DRIVE



**HD780** —P07  
**CD882** —P08



**CD901R<sup>3</sup>** —P09



**RD701** —P35  
**RD772** —P36  
**RD781** —P37  
**RD782** —P38  
**RD794** —P39  
**RD796** —P40  
**RT785** —P41  
**RT787** —P43  
**RT789** —P44



**MS661** —P62  
**MS662** —P63  
**MS663** —P64  
**MS667** —P65  
**MS668** —P66  
**MS669** —P67  
**MS676** —P68



**MS678** —P69  
**MS680** —P70  
**MS688** —P71  
**MS689** —P72  
**DT890** —P73  
**DT992** —P74



**WD703** —P92



**RD798** —P93

TRAILER



**TR528R<sup>3</sup>** —P10  
**TR601R<sup>3</sup>** —P11  
**DX670** —P12



**RH626** —P45  
**DX671** —P46



**DX770** —P75  
**DX771** —P76  
**DX775** —P77  
**DX776** —P78



# ST350

# ST351



The RoadX ST350 is a steer and trailer position tire for trucks traveling in long-haul applications.

**TIRE FEATURES:**

- 4-layer belt construction increases durability and driving comfort.
- Wide running surface, wide tread shoulder, and closed shoulder design promote even wear and improve wear resistance.
- Groove nodules effectively reduce stone retention.



The RoadX ST351 is a steer and trailer position tire for trucks traveling in long-haul applications.

**TIRE FEATURES:**

- The four layer belt design promotes even wear, improves wear resistance, and offers better driving comfort.
- Improved the tire bead strength to reduce the occurrence of deformation, thus improving driving safety.
- Closed shoulder design improves the tire's adaptability for mid and long-haul applications.



Plant	Size	Standard Rim(inch)	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimention(mm)	
				Kg		Lbs		Kpa		Psi		S	D			D	B
				S	D	S	D	S	D	S	D						
CN	12R22.5	9.00	18	3550	3250	7830	7160	930	930	135	135	152	149	16.5	L	1085	300

Plant	Size	Standard Rim(inch)	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimention(mm)	
				Kg		Lbs		Kpa		Psi		S	D			D	B
				S	D	S	D	S	D	S	D						
CN	295/80R22.5	9.00	18	3550	3250	7830	7160	900	900	130	130	152	149	16.7	M	1044	298

# ST355R<sup>3</sup>


# RH631



The RoadX ST355R3 is a steer position tire for trucks traveling in long-haul applications.

**TIRE FEATURES:**

- Four main groove design improves driving stability for greater driving comfort.
- The outer contour design is optimally balanced to greatly improve heat dissipation and high speed performance.
- The tread rubber compound is specially designed to improve wear resistance.

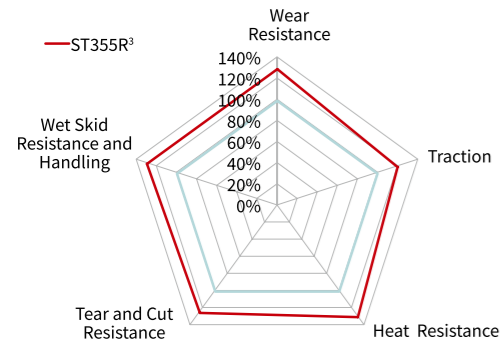

The RoadX RH631 is a steer and trailer position tire designed for trucks driving in long-haul applications.

**TIRE FEATURES:**

- The column at the bottom of the groove improves the tire's self-cleaning ability and prevents groove cracking.
- Four layer belt design promotes even ground distribution for longer mileage.
- Optimized groove design improves safety and handling performance.
- New low-heat build up and high wear resistance compound effectively improves tire life.
- Optimized contour design and tread compound balance stress distribution inside the tire to improve service life.



Plant	Size	Standard Rim(inch)	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
				Kg		Lbs		Kpa		Psi		S	D			D	B
				S	D	S	D	S	D	S	D						
CN/VN	11R22.5	8.25	16	3000	2725	6610	6005	830	830	120	120	146	143	14.5	M	1054	279
CN/VN	11R22.5	8.25	14	2800	2650	6175	5840	720	720	105	105	144	142	14.5	M	1054	279
CN/VN	11R24.5	8.25	14	3000	2725	6610	6005	720	720	105	105	146	143	14.5	M	1104	279
CN/VN	11R24.5	8.25	16	3250	3000	7160	6610	830	830	120	120	149	146	14.5	M	1104	279
CN/VN	295/75R22.5	9.00	14	2800	2575	6175	5675	760	760	110	110	144	141	14.5	M	1014	298
CN/VN	285/75R24.5	8.25	14	2800	2575	6175	5675	760	760	110	110	144	141	14.5	M	1050	283

Plant	Size	Standard Rim(inch)	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
				Kg		Lbs		Kpa		Psi		S	D			D	B
				S	D	S	D	S	D	S	D						
CN	12R22.5	9.00	18	3550	3250	7830	7160	930	930	135	135	152	149	15	L	1085	300
CN	315/80R22.5	9.00	20	4000	3650	8820	8045	850	850	125	125	156	153	14	L	1076	312
CN	385/65R22.5	11.75	18	4250		9370		830		120		158		13.5	L	1072	389
CN	385/65R22.5	11.75	20	4500		9920		900		130		160		13.5	K	1072	389



# HD780


# CD882



The RoadX HD780 is a drive position tire for trucks traveling in long-haul applications.

**TIRE FEATURES:**

- Central main groove design improves handling and driving comfort.
- Tread and open shoulder design improve traction and grip.
- Wide running surface effectively improves ground pressure distribution for greater traction.
- Sipe design effectively reduces noise emissions.

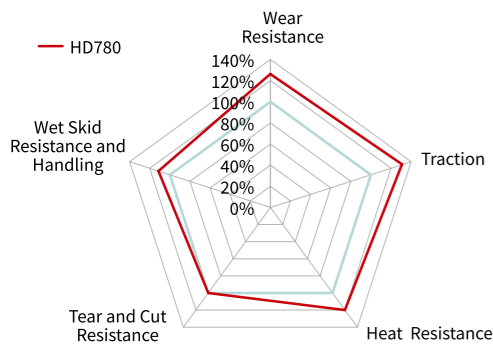

Plant	Size	Standard Rim(inch)	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
				Kg		Lbs		Kpa		Psi		S	D			D	B
				S	D	S	D	S	D	S	D						
VN	295/60R22.5	9.00	18	3350	3075	7390	6780	900	130	150	147	17	L	926	292		
CN/VN	295/80R22.5	9.00	18	3550	3250	7825	7165	900	900	130	130	152	149	17	L	1044	298
VN	295/80R22.5	9.00	16	3550	3150	7825	6945	850	850	125	125	152	148	17	M	1014	298
VN	315/60R22.5	9.75	18	3550	3150	7825	6945	900	130	152	148	18	L	950	313		
VN	315/70R22.5	9.00	16	3550	3150	7830	6940	850	850	123	123	152	148	18	M	1014	312
CN/VN	315/70R22.5	9.00	18	4000	3350	8820	7385	900	900	130	130	156	150	18	L	1014	312
CN/VN	315/80R22.5	9.00	18	4000	3350	8820	7385	850	850	125	125	156	150	18	L	1076	312
CN/VN	315/80R22.5	9.00	20	4000	3650	8820	8050	850	850	125	125	156	153	18	K	1076	312



The RoadX CD882 is a drive position tire for trucks and busses traveling in long-haul applications.

**TIRE FEATURES:**

- Ultra-deep tread pattern is designed to enhance tire mileage and extend tread life.
- The closed shoulder design promotes even wear.
- The tread blocks are designed to improve wear resistance and fuel consumption.
- The independent blocks provide greater traction.
- The tread design reduces block deformation and improves traction.



Plant	Size	Standard Rim(inch)	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
				Kg		Lbs		Kpa		Psi		S	D			D	B
				S	D	S	D	S	D	S	D						
CN	305/75R24.5	9.00	18	3750	3250	8270	7610	850	850	123	123	154	149	23	K	1080	305



# CD901R<sup>3</sup>

# TR528R<sup>3</sup>



The RoadX CD901 is a drive position tire suitable for trucks driving in long-haul applications.

**TIRE FEATURES:**

- Tread pattern promotes even wear and overall grip.
- Ultra wide based tire that helps to reduce overall vehicle weight.



The RoadX TR528R3 is a trailer position tire for trucks traveling in long-haul applications.

**TIRE FEATURES:**

- The tread is designed to promote even tread wear and improve skid resistance.
- Special tread compound design effectively improves fuel economy.
- Groove nodules effectively reduce stone retention.



Plant	Size	Standard Rim(inch)	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
				Kg		Lbs		Kpa		Psi		S	D			D	B
				S	D	S	D	S	D	S	D						
VN	445/50R22.5	14.00	20	4625		10200		830		120		161		19	L	1018	445

Plant	Size	Standard Rim(inch)	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
				Kg		Lbs		Kpa		Psi		S	D			D	B
				S	D	S	D	S	D	S	D						
CN/VN	11R22.5	8.25	14	2800	2650	6175	5840	720	720	105	105	144	142	9.5	M	1054	279
CN/VN	11R24.5	8.25	14	3000	2725	6610	6005	720	720	105	105	146	143	9.5	M	1104	279
CN/VN	295/75R22.5	9.00	14	2800	2575	6175	5675	760	760	110	110	144	141	9.5	M	1014	298
CN/VN	285/75R24.5	8.25	14	2800	2575	6175	5675	760	760	110	110	144	141	9.5	M	1050	283



# TR601R<sup>3</sup>

# DX670



The RoadX TR601 is a trailer position tire for trucks driving in long-haul applications.

**TIRE FEATURES:**


- Tread design is optimized to effectively disperse water for overall safer driving as well as improve wear resistance.
- Ultra wide based tire that helps to reduce overall vehicle weight.



The RoadX DX670 is a steer and trailer position tire for trucks driving in long-haul applications.

**TIRE FEATURES:**

- Tread compound improves wear resistance.
- Unique shoulder design promotes even wear.
- Widened running surface improves ground contact area for better grip.
- Groove nodules improve handling and driving comfort.

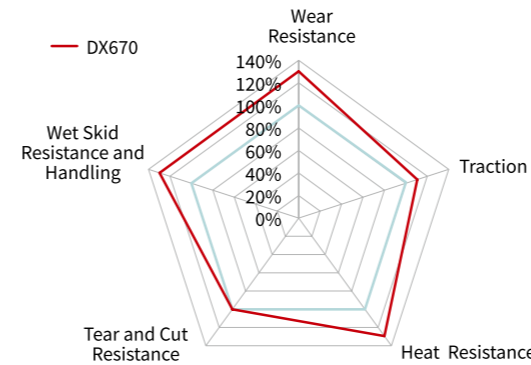

Plant	Size	Standard Rim(inch)	PR	Load				Pressure				Load Index	Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
				Kg		Lbs		Kpa		Psi					D	B
				S	D	S	D	S	D	S	D					
VN	445/50R22.5	14.00	20	4625	10200	830	120	161	10	L	1018	445				

Plant	Size	Standard Rim(inch)	PR	Load				Pressure				Load Index	Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
				Kg		Lbs		Kpa		Psi					D	B
				S	D	S	D	S	D	S	D					
VN	385/55R22.5	12.25	18	4250	9370	850	123	158	14.5	L	996	386				
CN/VN	385/55R22.5	12.25	20	4500	9920	850	123	160	14.5	K	996	386				
CN/VN	385/65R22.5	11.75	20	5000	11000	900	130	164	15.5	K	1072	389				
CN/VN	385/65R22.5	11.75	20	4500	9920	900	130	160	15.3	K	1072	389				
VN	385/65R22.5	11.75	24	5000	11000	900	130	164	15.5	K	1072	389				
VN	385/65R22.5	11.75	18	4250	9370	850	123	158	15.3	L	1072	389				
CN/VN	435/50R19.5	14.00	20	4500	9920	900	130	160	12.5	J	931	438				
CN/VN	445/45R19.5	15.00	20	4500	9920	900	130	160	13	J	895	446				



# RH300

# RH618



The RoadX RH300 is an all-position tire for trucks traveling in regional applications.

**TIRE FEATURES:**

- Tread compound offers improved wear resistance.
- Main tread grooves improve handling and wet skid resistance.
- Open shoulder design and compound improves durability.



The RoadX RH618 is a steer position tire for trucks running in regional applications.

**TIRE FEATURES:**

- Sipe grooves improve heat dissipation, grip and wet skid resistance.
- Upgraded groove design helps to reduce stone retention.
- Tread pattern is optimized to improve maneuverability at high speeds.



Plant	Size	Standard Rim(inch)	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
				Kg		Lbs		Kpa		Psi		S	D			D	B
				S	D	S	D	S	D	S	D						
CN/VN	6.50R16LT	5.50F	12	1060	925	2335	2040	670	670	97	97	110	105	10.5	L	750	185
CN	6.50R16LT	5.50F	12	1060	925	2335	2040	670	670	97	97	110	105	10.5	N	750	185
CN/VN	7.00R16LT	5.50F	14	1320	1180	2910	2600	770	770	112	112	118	114	11.5	L	775	200
CN	7.00R16LT	5.50F	14	1320	1180	2910	2600	770	770	112	112	118	114	11.5	N	775	200
CN/VN	7.50R16LT	6.00G	14	1500	3120	3305	2910	770	770	112	112	122	118	12.5	L	805	215
CN	7.50R16LT	6.00G	16	1650	1450	3640	3195	870	870	126	126	125	121	14.5	K	805	215
CN/VN	8.25R16LT	6.50H	16	1800	1600	3970	3525	770	770	112	112	128	124	14	L	865	235

Plant	Size	Standard Rim(inch)	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
				Kg		Lbs		Kpa		Psi		S	D			D	B
				S	D	S	D	S	D	S	D						
CN	315/80R22.5	9.00	20	4000	3650	8820	8050	850	850	123	123	156	153	15	K	1076	312



# RH620

# RH620ST



The RoadX RH620 is a trailer position tire for trucks driving in regional applications.

**TIRE FEATURES:**

- Wide main grooves effectively expel water for improved driving performance on wet roads.
- Wide footprint effectively distributes weight for improved stability and even tread wear.
- Improved tread compound increases tire durability thus offering extended service life.



The RoadX RH620ST is a trailer position tire for trucks driving in regional applications.

**TIRE FEATURES:**

- Wide main grooves effectively expel water for greater driving performance on wet roads.
- Wide footprint effectively distributes weight for improved stability and even tread wear.
- Improved tread compound increases tire durability thus offering extended service life.



Plant	Size	Standard Rim(inch)	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
				Kg		Lbs		Kpa		Psi		S	D			D	B
				S	D	S	D	S	D	S	D						
CN/VN	215/75R17.5	6.00	16	2180	2060	4805	4540	860	860	125	125	135	133	13	L	767	211
CN/VN	225/70R19.5	6.75	14	1800	1700	3970	3750	760	760	110	110	128	126	13	L	811	226
CN/VN	235/75R17.5	6.75	16	2725	2575	6005	5675	860	860	125	125	143	141	13.5	L	797	233
CN/VN	235/75R17.5	6.75	18	2725	2575	6005	5675	860	860	125	125	143	141	13.5	L	797	233
CN/VN	245/70R19.5	7.50	14	2060	1950	4540	4300	760	760	110	110	133	131	13.5	L	839	248
VN	245/70R19.5	7.50	16	2180	2060	4805	4540	860	860	125	125	135	133	13.5	L	839	248
CN/VN	255/70R22.5	7.50	16	2500	2300	5510	5070	830	830	120	120	140	137	13.5	L	930	255
CN/VN	275/70R22.5	8.25	18	3150	2900	6940	6395	900	900	130	130	148	145	15	M	958	275

Plant	Size	Standard Rim(inch)	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
				Kg		Lbs		Kpa		Psi		S	D			D	B
				S	D	S	D	S	D	S	D						
VN	ST235/80R16	6.50	14	1850	1650	4080	3640	760	760	110	110	129	125	8	L	782	235
CN/VN	ST235/85R16	6.50	12	1800	1600	3960	3520	660	660	95	95	128	124	9	L	806	235
VN	ST235/85R16	6.50	14	2000	1750	4400	3860	760	760	110	110	132	127	9	L	806	235




# RH621



The RoadX RH621 is a steer position tire designed for trucks and busses traveling in regional applications.

### TIRE FEATURES:

- Groove and sipe design improve tire grip.
- The wide running surface improves pressure distribution for better traction.
- Groove nodules improve handling and driving comfort.
- The wide shoulders and shallow groove design effectively dissipate heat to promote even shoulder wear.

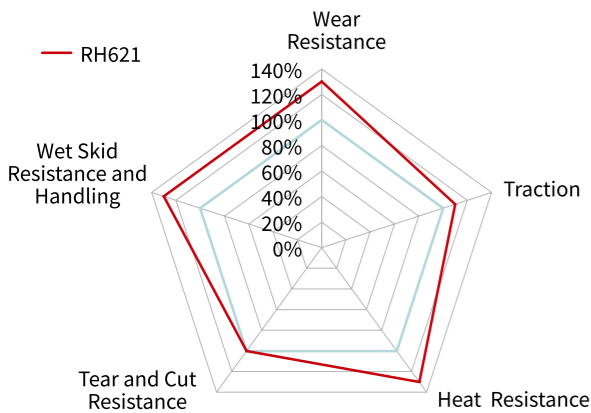

Plant	Size	Standard Rim(inch)	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
				Kg		Lbs		Kpa		Psi		S	D			D	B
				S	D	S	D	S	D	S	D						
CN	8.5R17.5	6.00	12	1450	1400	3195	3085	625	625	90	90	121	120	11	M	802	215
CN	9.5R17.5	6.75	16	2060	1950	4540	4300	830	830	120	120	133	131	13.5	M	842	240
CN	9.5R17.5	6.75	18	2725	2575	6005	5675	875	875	125	125	143	141	13.5	J	842	240
CN	11R22.5	8.25	16	3150	2900	6940	6395	850	850	123	123	148	145	15	M	1054	279
CN	12R22.5	9.00	18	3550	3250	7830	7160	930	930	135	135	152	149	16	L	1085	300
CN/VN	205/75R17.5	6.00	14	1600	1500	3525	3305	750	750	110	110	124	122	13	M	753	205
VN	215/75R17.5	6.00	14	1700	1600	3750	3525	700	700	110	110	126	124	12.5	M	767	211
CN/VN	215/75R17.5	6.00	16	2180	2060	4805	4540	860	860	125	125	135	133	12.5	L	767	211
VN	215/75R17.5	6.00	16	1800	1700	3970	3750	750	750	110	110	128	126	12.5	M	767	211
CN/VN	215/75R17.5	6.00	18	2240	2120	4940	4675	890	890	129	129	136	134	12.5	J	767	211
CN	225/70R19.5	6.75	14	1800	1700	3970	3750	760	760	110	110	128	126	12.5	L	811	226
VN	225/75R17.5	6.75	14	1850	1750	4080	3860	725	725	125	125	129	127	12.5	M	783	226
CN	225/80R17.5	6.75	14	1550	1500	3420	3310	700	700	102	102	123	122	13	M	805	226
CN	225/80R17.5	6.75	18	1550	1500	3420	3310	700	700	102	102	123	122	13	M	805	226
CN/VN	235/75R17.5	6.75	18	2725	2575	6005	5675	860	860	125	125	143	141	13	L	797	233
VN	235/75R17.5	6.75	16	2000	1900	4410	4190	760	760	110	110	132	130	13	M	797	233
VN	245/70R17.5	7.50	18	2725	2575	6005	5675	875	875	125	125	143	141	13	J	789	248
CN/VN	245/70R19.5	7.50	16	2240	2120	4940	4675	830	830	120	120	136	134	13	M	839	248
CN/VN	245/70R19.5	7.50	18	2800	2650	6175	5840	900	900	130	130	144	142	13	J	839	248
CN	255/70R22.5	7.50	16	2500	2300	5510	5070	830	830	120	120	140	137	13.5	M	930	255
CN/VN	265/70R19.5	7.50	18	2725	2575	6005	5675	900	900	130	130	143	141	13.5	J	867	262
CN/VN	265/70R19.5	7.50	16	2500	2360	5510	5205	760	760	110	110	140	138	13.5	M	867	262
CN/VN	275/70R22.5	8.25	16	3150	2900	6940	6395	900	900	130	130	148	145	14.5	M	958	275
CN/VN	285/70R19.5	8.25	18	3350	3150	7390	6940	900	900	130	130	150	148	13	K	895	283
VN	285/70R19.5	8.25	16	3000	2800	6610	6175	900	900	130	130	146	144	13	M	895	283
CN/VN	295/80R22.5	9.00	18	3550	3250	7825	7165	900	900	130	130	152	149	16	M	1044	298
VN	295/80R22.5	9.00	18	3750	3250	8270	7160	850	850	123	123	154	149	16	M	1044	298
CN	305/70R22.5	9.00	20	3650	3350	8050	7390	900	900	130	130	153	150	15	K	1000	305
VN	315/60R22.5	9.75	18	3550	3150	7825	6945	900	900	130	130	152	148	14.5	L	950	313
VN	315/70R22.5	9.00	18	4000	3350	8820	7385	900	900	130	130	156	150	15.5	L	1014	312
VN	315/70R22.5	9.00	16	3550	3150	7830	6940	850	850	123	123	152	148	15.5	M	1014	312
CN/VN	315/80R22.5	9.00	20	4000	3650	8820	8050	850	850	125	125	156	153	16.5	L	1076	312
CN/VN	315/80R22.5	9.00	18	4000	3350	8820	7385	850	850	125	125	156	150	16.5	L	1076	312



# RH621+


# RH622



The RoadX RH621+ is a steer position tire designed for trucks and busses traveling in regional applications.

**TIRE FEATURES:**

- Groove and sipe design improve tire grip.
- The wide running surface improves pressure distribution for better traction.
- Groove nodules improve handling and driving comfort.
- The wide shoulders and shallow groove design effectively dissipate heat to promote even shoulder wear.

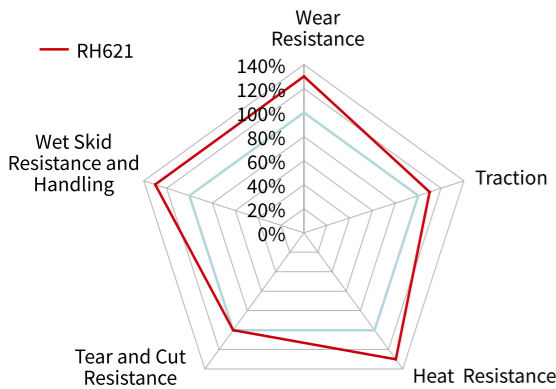

Plant	Size	Standard Rim(Inch)	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
				Kg		Lbs		Kpa		Psi		S	D			D	B
				S	D	S	D	S	D	S	D						
CN	245/70R19.5	7.50	18	2800	2650	6175	5840	900	900	130	130	144	142	13	J	839	248
CN	245/70R19.5	7.50	16	2240	2120	4940	4675	825	825	120	120	136	134	13	M	839	248



The RoadX RH622 is a steer and trailer position tire for trucks and busses driving in regional applications.

**TIRE FEATURES:**

- Large main grooves improve handling and high speed performance.
- Tread groove and sipe design improve traction and braking performance on wet roads.
- Tread compound and wide driving surface effectively improves overall mileage.
- Groove nodules reduce stone retention.



Plant	Size	Standard Rim(Inch)	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
				Kg		Lbs		Kpa		Psi		S	D			D	B
				S	D	S	D	S	D	S	D						
VN	295/80R22.5	9.00	18	3550	3250	7830	7830	900	900	130	130	152	149	14.5	M	1044	298



# RH630

# RH632



The RoadX RH630 is a steer position tire for trucks traveling in regional applications.

**TIRE FEATURES:**

- The groove designs extending through the main block strips improve heat dissipation, grip and wet skid resistance.
- Wide running surface improves ground pressure distribution for greater handling performance.
- Optimized groove design improves maneuverability and driving comfort.
- Closed shoulder design enhances tread wear resistance and effectively promotes even shoulder wear.
- The zigzag groove design and groove stone ejectors effectively reduce stone retention.



The RoadX RH632 is a steer tire for trucks driving in regional applications.

**TIRE FEATURES:**

- Variable pitch tread design reduces noise emissions.
- Optimized contour design and wide tread improve wear resistance and effective mileage.
- Shoulder notches and sipes better dissipate heat when running at high speeds.
- A jagged and staggered groove design effectively reduces stone retention.



Plant	Size	Standard Rim(inch)	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
				Kg		Lbs		Kpa		Psi		S	D			D	B
				S	D	S	D	S	D	S	D						
CN	305/75R24.5	9.00	18	3750	3250	8270	7610	850	850	123	123	154	149	15.1	K	1080	305

Plant	Size	Standard Rim(inch)	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
				Kg		Lbs		Kpa		Psi		S	D			D	B
				S	D	S	D	S	D	S	D						
VN	11.00R20	8.0	18	3550	3250	7830	7160	930	930	135	135	152	149	16	K	1085	293



# RH632A

# RH636



The RoadX RH632A is a steer tire for trucks driving in regional applications.

**TIRE FEATURES:**

- Variable pitch tread design reduces noise emissions.
- Optimized contour design and wide tread improve wear resistance and effective mileage.
- Shoulder notches and sipes better dissipate heat when running at high speeds.
- A jagged and staggered groove design effectively reduces stone retention.



The RoadX RH636 is a steer position tire for trucks driving in regional applications.

**TIRE FEATURES:**

- Fine grooves located in the ribs provide good heat dissipation, strong grip, and improved skid resistance.
- Slight modifications in the shoulder design effectively promote even wear.
- The wide running surface and deep groove pattern design effectively enhance scrub resistance for increased mileage.



Plant	Size	Standard Rim(inch)	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
				Kg		Lbs		Kpa		Psi		S	D			D	B
				S	D	S	D	S	D	S	D						
CN	11.00R20	8.0	16	3350	3075	7390	6780	830	830	120	120	150	147	14.5	K	1085	293
CN	11.00R20	8.0	18	3550	3250	7830	7160	930	930	135	135	152	149	14.5	K	1085	293

Plant	Size	Standard Rim(inch)	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
				Kg		Lbs		Kpa		Psi		S	D			D	B
				S	D	S	D	S	D	S	D						
VN	10.00R20	7.5	18	3250	3000	7160	6610	930	930	135	135	149	146	16	K	1054	278



# RH638L

# RH642



The RoadX RH638L is a steer and trailer position tire for trucks driving in long-haul applications.

**TIRE FEATURES:**

- All new tread contour design not only offers greater overall performance, but also improves the tire's footprint and helps to evenly distribute ground pressure for better wear resistance.
- Wide and deep tread pattern effectively improves tires usage life.



The RoadX RH642 is a steer and trailer position tire designed for trucks and vans running in regional applications.

**TIRE FEATURES:**

- Great high speed stability.
- Effective wear resistance.
- Reduced stone retention.



Plant	Size	Standard Rim(inch)	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
				Kg		Lbs		Kpa		Psi		S	D			D	B
				S	D	S	D	S	D	S	D						
CN	12R22.5	9.00	18	3550	3250	7830	7160	930	930	135	135	152	149	17.5	L	1085	300

Plant	Size	Standard Rim(inch)	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
				Kg		Lbs		Kpa		Psi		S	D			D	B
				S	D	S	D	S	D	S	D						
VN	11R22.5	8.25	18	3250	3000	7160	6610	930	930	135	135	149	146	15.5	M	1054	279
VN	11R22.5	8.25	16	3150	2900	6940	6395	850	850	123	123	148	145	15.5	M	1065	279
VN	11.00R20	8.0	18	3550	3250	7830	7160	930	930	135	135	152	149	15	L	1085	293
VN	12R22.5	9.00	18	3550	3250	7830	7160	930	930	135	135	152	149	16.5	L	1085	300



# RH644


# RH646



The RoadX RH644 is a steer and trailer position tire for trucks and busses driving in regional applications.

**TIRE FEATURES:**


- Large main grooves improve handling and high speed performance.
- Tread groove and sipe design improve traction and braking performance on wet roads.
- Sipe design effectively improves heat dissipation to promote even wear.
- Groove nodules reduce stone retention.

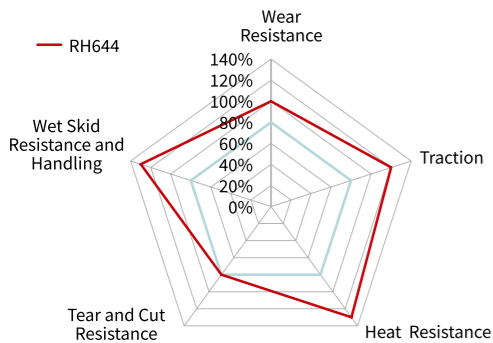

The RoadX RH646 is a steer position tire for trucks driving in regional applications.

**TIRE FEATURES:**

- Main groove and sipe designs offer great wet skid resistance and improved handling.
- Shoulder sipes and heat-resistant rubber offer significantly tire durability.
- Tread compound significantly improves wear resistance.

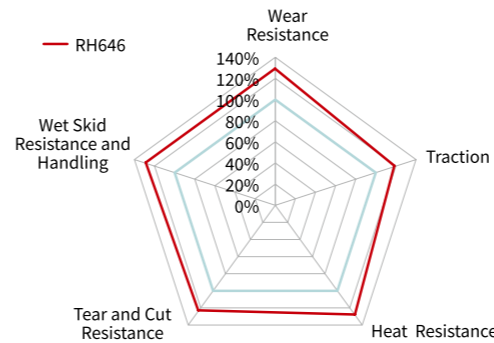

Plant	Size	Standard Rim(inch)	PR	Load				Pressure				Load Index	Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)		
				Kg		Lbs		Kpa		Psi					D	B	
				S	D	S	D	S	D	S	D	S	D				
CN	11R24.5	8.25	16	3250	3000	7160	6610	830	830	120	120	149	146	14.5	M	1104	279
VN	11R22.5	8.25	16	3150	2900	6940	6395	850	850	123	123	148	145	14.5	M	1065	279
VN	11R22.5	8.25	18	3250	3000	7160	6610	930	930	135	135	149	146	14.5	M	1065	279

Plant	Size	Standard Rim(inch)	PR	Load				Pressure				Load Index	Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)		
				Kg		Lbs		Kpa		Psi					D	B	
				S	D	S	D	S	D	S	D	S	D				
VN	11R22.5	8.25	16	3000	2725	6610	6005	830	830	120	120	146	143	15.5	L	1054	279
VN	11R22.5	8.25	18	3250	3000	7160	6610	930	930	135	135	149	146	15.5	L	1054	279
VN	12R22.5	9.00	18	3550	3250	7825	7165	930	930	135	135	152	149	16	K	1085	300
VN	315/80R22.5	9.00	20	4000	3650	8820	8045	850	850	125	125	156	153	16	L	1076	312
VN	315/80R22.5	9.00	20	4125	3750	9090	8270	900	900	130	130	157	154	16	L	1076	312



# RH648

# RH648R<sup>3</sup>



The RoadX RH648 is a steer position tire for trucks and busses traveling in regional applications.

**TIRE FEATURES:**

- Broad five rib design offers exceptional handling and driving stability.
- Four main grooves effectively drain water for improved traction on wet roads.
- Groove nodules reduce stone retention.



The RoadX RH648R<sup>3</sup> is a steer position tire for trucks and busses traveling in regional applications.

**TIRE FEATURES:**

- Broad 4 rib design delivers precise handling performance.
- Wide main grooves efficiently expel water for improved traction on wet roads.
- Rubber nodules at the groove bottom reduce stone retention.



Plant	Size	Standard Rim(inch)	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
				Kg		Lbs		Kpa		Psi							
				S	D	S	D	S	D	S	D	S	D			D	B
CN	275/80R22.5	8.25	16	3000	2725	6610	6005	830	830	120	120	146	143	14.5	M	1012	276
CN	295/80R22.5	9.00	16	3550	3150	7830	6940	850	850	123	123	152	148	14.5	M	1044	298
CN	295/80R22.5	9.00	18	3550	3250	7830	7160	900	900	130	130	152	149	14.5	M	1044	298
CN	315/80R22.5	9.00	18	3750	3450	8270	7610	830	830	120	120	154	151	15	L	1076	312
CN	315/80R22.5	9.00	20	4125	3750	9090	8270	900	900	130	130	157	154	15	K	1076	312

Plant	Size	Standard Rim(inch)	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
				Kg		Lbs		Kpa		Psi							
				S	D	S	D	S	D	S	D	S	D			S	D
CN/VN	11R22.5	8.25	14	2800	2650	6175	5840	720	720	105	105	144	142	14.5	M	1054	279
CN/VN	11R22.5	8.25	16	3000	2725	6610	6005	830	830	120	120	146	143	14.5	M	1054	279
CN/VN	11R24.5	8.25	14	3000	2725	6610	6005	720	720	105	105	146	143	14.5	M	1104	279
CN/VN	11R24.5	8.25	16	3250	3000	7160	6610	830	830	120	120	149	146	14.5	M	1104	279
CN/VN	285/75R24.5	8.25	14	2800	2575	6175	5675	760	760	110	110	144	141	14.5	M	1050	283
CN/VN	295/75R22.5	9.00	14	2800	2575	6175	5675	760	760	110	110	144	141	14.5	M	1014	298
CN/VN	295/75R22.5	9.00	16	3000	2725	6610	6005	830	830	120	120	146	143	14.5	M	1014	298



# RH649

# RH697



The RoadX RH649 is a steer and trailer tire for trucks traveling in regional road applications.

**TIRE FEATURES:**

- Main tread groove design offers excellent handling performance.
- The tread sipe design helps to improve the tire's adaptability to a variety of road conditions.
- The tread utilizes an updated compound to improve wear and tear resistance for improved overall mileage and adaptability on more rough road conditions.



The RoadX RH697 is an all-position tire for trucks and busses driving in regional applications.

**TIRE FEATURES:**

- Tread compound and shoulder design effectively help to extend tire service life.
- Tread sipe design improves traction and wet skid resistance.
- Groove design improves performance in various regional applications.



Plant	Size	Standard Rim(inch)	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
				Kg		Lbs		Kpa		Psi		S	D			D	B
				S	D	S	D	S	D	S	D						
VN	275/80R22.5	8.25	16	3250	3000	7160	6610	850	850	123	123	149	146	16	L	1012	276

Plant	Size	Standard Rim(inch)	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
				Kg		Lbs		Kpa		Psi		S	D			D	B
				S	D	S	D	S	D	S	D						
CN	7.50R16LT	6.00G	14	1320	1180	3305	2910	770	770	112	112	122	118	10	L	805	215
CN	7.00R16LT	5.50F	14	1320	1180	2910	2600	770	770	112	112	118	114	10	M	775	200
CN	7.00R16LT	5.50F	14	1320	1180	2910	2600	770	770	112	112	118	114	10	N	775	200



# AP351

# AP838L



The RoadX AP351 is an all-position tire for trucks traveling in regional applications.

**TIRE FEATURES:**

- Shoulder design improves heat dissipation and driving stability.
- Wide tread and tread compound improve wear resistance.
- Sipe and block pattern design evenly distribute ground pressure for greater grip.



The RoadX AP838L is an all-position tire for trucks traveling in long-haul applications.

**TIRE FEATURES:**

- All new tread contour design not only offers greater overall performance, but also improves the tire's footprint and helps to evenly distribute ground pressure for better wear resistance.
- Wide and deep tread pattern effectively improves tire usage life.



Plant	Size	Standard Rim(Inch)	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
				Kg		Lbs		Kpa		Psi		S	D			D	B
				S	D	S	D	S	D	S	D						
VN	7.50R16LT	6.00G	14	1500	1320	3310	2910	770	770	110	110	122	118	12.5	L	805	215

Plant	Size	Standard Rim(Inch)	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
				Kg		Lbs		Kpa		Psi		S	D			D	B
				S	D	S	D	S	D	S	D						
CN	12R22.5	9.00	18	3550	3250	7830	7160	930	930	135	135	152	149	17.5	K	1085	300



# RD701

# RD772



The RoadX RD701 is a drive tire for trucks traveling in regional applications.

**TIRE FEATURES:**

- Optimized pattern design provides better driving and braking performance.
- Open shoulder design improves heat dissipation.
- Deep tread design and special tread compound improve overall durability.



The RoadX RD772 is a drive position tire for trucks running in regional applications.

**TIRE FEATURES:**

- Wide tread grooves effectively improve grip.
- Optimized tread width improves traction and helps to reduce fuel consumption.
- The transverse sipe design improves wet traction.



Plant	Size	Standard Rim(Inch)	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
				Kg		Lbs		Kpa		Psi		S	D			D	B
				S	D	S	D	S	D	S	D						
VN	10.00R20	7.5	18	3250	3000	7160	6610	930	930	135	135	149	146	19	K	1054	278

Plant	Size	Standard Rim(Inch)	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
				Kg		Lbs		Kpa		Psi		S	D			D	B
				S	D	S	D	S	D	S	D						
CN	315/80R22.5	9.00	20	4000	3650	8820	8050	850	850	123	123	156	153	19.5	K	1076	312



# RD781


# RD782



The RoadX RD781 is a drive position tire for trucks traveling in regional applications.

**TIRE FEATURES:**


- Tread block design effectively improves traction and heat dissipation.
- Tread profile design improves ground pressure distribution for greater driving stability.
- Deepend tread pattern and tire compound improve wear and tear resistance for a longer service life.

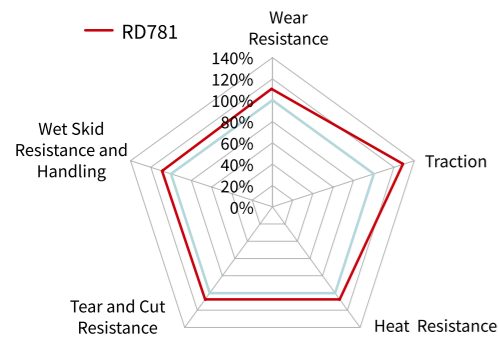

The RoadX RD782 is a drive position tire for trucks traveling in regional applications.

**TIRE FEATURES:**

- Shoulder blocks are connected with a rib design to improve tear resistance and promote even wear.
- Open shoulder and tread block design improve traction and heat dissipation.
- Optimized tread profile and wide tread improve service life.

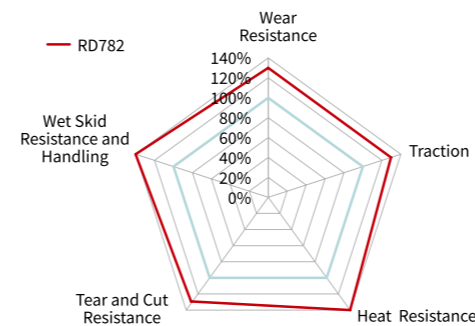

Plant	Size	Standard Rim(inch)	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
				Kg		Lbs		Kpa		Psi		S	D			D	B
				S	D	S	D	S	D	S	D						
CN/VN	11R22.5	8.25	16	3000	2725	6610	6005	830	830	120	120	146	143	19.5	K	1065	279
VN	12R22.5	9.00	18	3550	3250	7825	7165	930	930	135	135	152	149	20	K	1096	300
CN/VN	295/80R22.5	9.00	18	3550	3250	7830	7160	900	900	130	130	152	149	21	L	1044	298
CN	305/70R22.5	9.00	16	3350	3150	7390	6940	850	850	123	123	150(152)	148(148)	20	M(L)	1000	305
CN	305/70R22.5	9.00	20	3650	3350	8050	7390	900	900	130	130	153	150	20	L	1000	305
CN/VN	315/80R22.5	9.00	20	4000	3650	8820	8045	850	850	125	125	156	153	20	L	1076	312

Plant	Size	Standard Rim(inch)	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
				Kg		Lbs		Kpa		Psi		S	D			D	B
				S	D	S	D	S	D	S	D						
CN	11R22.5	8.25	16	3000	2725	6610	6005	830	830	120	120	146	143	21.5	L	1065	279
CN	11R22.5	8.25	16	3150	2900	6940	6395	850	850	123	123	148	145	21	L	1065	279
CN	12R22.5	9.00	18	3550	3250	7830	7160	930	930	135	135	152	149	22.5	K	1096	300
CN	275/70R22.5	8.25	16	3150	2900	6940	6395	900	900	130	130	148	145	20	M	958	275



# RD794

# RD796



The RoadX RD794 is a drive position tire for trucks traveling in regional applications.

**TIRE FEATURES:**

- The horizontal grooves are designed to offer exceptional grip and traction.
- Open shoulder design effectively reduces heat buildup.



The RoadX RD796 is a drive position tire for trucks traveling in regional applications.

**TIRE FEATURES:**

- Aggressive, open-shoulder tread improves self cleaning capabilities for exceptional traction in mud and snow.
- Staggered tread blocks evenly distribute pressure to promote even wear.
- Deep 25/32" tread depth improves service life.



Plant	Size	Standard Rim(inch)	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
				Kg		Lbs		Kpa		Psi		S	D			D	B
				S	D	S	D	S	D	S	D						
VN	9.00R20	7.0	16	2800	2650	6175	5840	900	900	130	130	144	142	16	K	1019	259
VN	10.00R20	7.5	18	3250	3000	7160	6610	930	930	135	135	149	146	17.5	K	1054	278
VN	11.00R20	8.0	18	3550	3250	7830	7160	930	930	135	135	152	149	17.5	K	1085	293
VN	11R22.5	8.25	18	3250	3000	7160	6610	930	930	135	135	149	146	21.5	K	1065	279
CN	11R24.5	8.25	16	3250	3000	7160	6610	830	830	120	120	149	146	20	L	1104	279
CN/VN	295/75R22.5	9.00	16	3000	2725	6610	6005	830	830	120	120	146	143	20	K	1014	298
CN	285/75R24.5	8.25	16	3075	2800	6780	6175	830	830	120	120	147	144	20	J	1050	283

Plant	Size	Standard Rim(inch)	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
				Kg		Lbs		Kpa		Psi		S	D			D	B
				S	D	S	D	S	D	S	D						
VN	10R22.5	7.50	14	2575	2430	5675	5355	790	790	115	115	141	139	18.5	M	1030	254
CN/VN	11R22.5	8.25	14	2800	2650	6175	5840	720	720	105	105	144	142	20	L	1054	279
VN	11R22.5	8.25	14	2800	2650	6175	5840	720	720	105	105	144	142	19.5	M	1065	279
CN/VN	11R22.5	8.25	16	3000	2725	6610	6005	830	830	120	120	146	143	20	L	1054	279
VN	11R22.5	8.25	16	3000	2725	6610	6005	830	830	120	120	146	143	19.5	M	1065	279
CN/VN	11R24.5	8.25	14	3000	2725	6610	6005	720	720	105	105	146	143	20	L	1104	279
VN	11R24.5	8.25	14	3000	2725	6610	6005	720	720	105	105	146	143	19.5	M	1116	279
CN/VN	11R24.5	8.25	16	3250	3000	7160	6610	830	830	120	120	149	146	20	L	1104	279
VN	11R24.5	8.25	16	3250	3000	7160	6610	830	830	120	120	149	146	19.5	M	1116	279
VN	255/70R22.5	7.50	16	2500	2300	5510	5070	830	830	120	120	140	137	20	L	930	255
VN	295/75R22.5	9.00	16	3000	2725	6610	6005	830	830	120	120	146	143	20	L	1014	298
VN	295/75R22.5	9.00	14	2800	2575	6175	5675	760	760	110	110	144	141	20	L	1014	298




# RT785



The RoadX RT785 is a drive position tire for trucks driving in regional applications.

**TIRE FEATURES:**

- Tread block sipe design improves heat dissipation.
- Wide tread grooves effectively improve self-cleaning performance and traction.
- Wide tread improve handling and driving safety.
- Rib connectors between the tread blocks improve rigidity and promote even wear.

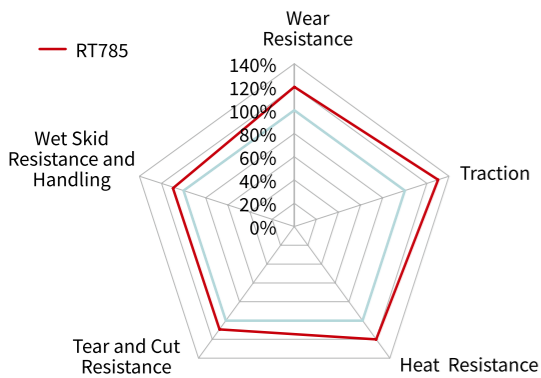

Plant	Size	Standard Rim(inch)	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
				Kg		Lbs		Kpa		Psi		S	D			D	B
				S	D	S	D	S	D	S	D						
CN	9.5R17.5	6.75	16	2060	1950	4540	4300	830	830	120	120	133	131	16.5	M	850	240
CN	9.5R17.5	6.75	18	2725	2575	6005	5675	875	875	66	66	143	141	16.5	J	842	240
CN/VN	205/75R17.5	6.00	14	1600	1500	3525	3315	750	750	110	110	124	122	15	L	753	205
CN/VN	215/75R17.5	6.00	16	2180	2060	4805	4540	860	860	125	125	135	133	15	L	773	211
VN	215/75R17.5	6.00	14	1700	1600	3750	3525	700	700	100	100	126	124	15	M	767	211
CN/VN	215/75R17.5	6.00	18	2240	2120	4940	4675	890	890	129	129	136	134	15	J	767	211
VN	225/70R19.5	6.75	14	1800	1700	3970	3750	760	760	110	110	128	126	15	L	811	226
VN	225/75R17.5	6.75	14	1850	1750	4080	3860	725	725	125	125	129	127	15	M	783	226
CN/VN	235/75R17.5	6.75	18	2725	2575	6005	5675	860	860	120	120	143	141	15	L	797	233
VN	235/75R17.5	6.75	16	2000	1900	4410	4190	760	760	110	110	132	130	15	M	797	233
VN	245/70R17.5	7.50	16	2240	2120	4940	4675	850	850	125	125	136	134	15.5	M	789	248
VN	245/70R19.5	7.50	16	2240	2120	4940	4675	830	830	120	120	136	134	15.5	M	845	248
CN	245/70R19.5	7.50	18	2800	2650	6175	5840	900	900	130	130	144	142	15.5	J	845	248
CN/VN	265/70R19.5	7.50	18	2725	2575	6005	5675	900	900	130	130	143	141	15.5	J	867	262
VN	265/70R19.5	7.50	16	2500	2360	5510	5205	760	760	110	110	140	138	15.5	M	867	262
CN/VN	285/70R19.5	8.25	18	3350	3150	7390	6940	900	900	130	130	150	148	16	K	895	283
VN	285/70R19.5	8.25	16	3000	2800	6610	6175	900	900	130	130	146	144	16	M	895	283
VN	295/60R22.5	9.00	18	3350	3075	7390	6780	900	900	130	130	150	147	19	L	926	262
CN/VN	295/80R22.5	9.00	18	3550	3250	7825	7165	900	900	130	130	152	149	22	L	1044	298
CN/VN	295/80R22.5	9.00	16	3550	3150	7825	6945	850	850	125	125	152	148	22	M	1044	298
VN	315/60R22.5	9.75	18	3550	3150	7825	6945	900	900	130	130	152	148	20	L	950	313
VN	315/70R22.5	9.00	18	4000	3350	8820	7385	900	900	130	130	156	150	20	L	1014	312
CN/VN	315/80R22.5	9.00	20	4000	3650	8820	8050	850	850	125	125	156	153	22.5	K	1076	312
CN/VN	315/80R22.5	9.00	18	4000	3350	8820	7385	850	850	123	123	156	150	22.5	L	1076	312



# RT787

# RT789



The RoadX RT787 is a drive position tire for trucks driving in winter applications.

**TIRE FEATURES:**

- 3 Peak Mountain Snowflake (3PMS) certified tire designed to handle rigorous cold weather applications.
- Tread block design effectively improves performance in both on and off-road applications.
- Wide tread grooves effectively clear mud and snow.



The RoadX RT789 is a steer and trailer tire for trucks traveling in regional road applications.

**TIRE FEATURES:**

- The tread block pattern is designed to improve heat dissipation for longer driving performance
- The angled groove wall helps to effectively distribute ground pressure on the blocks and promotes even tread wear.
- The tread utilizes an updated compound to improve wear and tear resistance for improved overall mileage and adaptability on more rough road conditions.



Plant	Size	Standard Rim(inch)	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
				Kg		Lbs		Kpa		Psi		S	D			D	B
				S	D	S	D	S	D	S	D						
CN/VN	225/70R19.5	6.75	14	1800	1700	3970	3750	760	760	110	110	128	124	16.5	L	811	226
CN/VN	245/70R19.5	7.50	16	2180	2060	4805	4540	860	860	125	125	135	133	16.5	L	839	248

Plant	Size	Standard Rim(inch)	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
				Kg		Lbs		Kpa		Psi		S	D			D	B
				S	D	S	D	S	D	S	D						
VN	275/80R22.5	8.25	16	3250	3000	7160	6610	850	850	123	123	149	146	21	L	1012	276



# RH626


# DX671



The RoadX RH626 is a trailer position tire for trucks traveling in regional applications.

**TIRE FEATURES:**


- Small sipes improve heat dissipation and grip.
- Main tread grooves improve directional stability.
- Rubber nodules at the bottom of the groove effectively reduce stone retention.

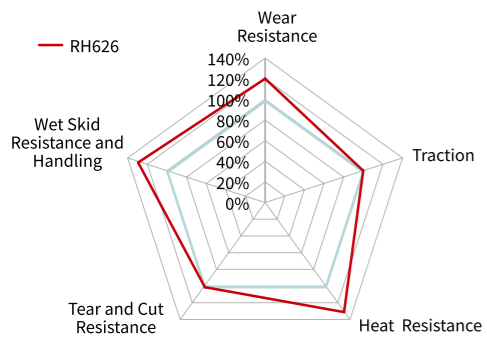

The RoadX DX671 is a trailer position tire for trucks driving in regional applications.

**TIRE FEATURES:**

- Tread compound improves wear resistance.
- Variable pitch and narrow grooves effectively reduce noise emissions.
- Wide running surface improves grip.
- Sipes improve heat dissipation, grip and wet skid resistance.
- Main grooves improve directional handling.

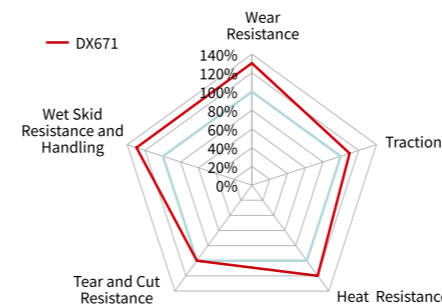

Plant	Size	Standard Rim(inch)	PR	Load				Pressure				Load Index	Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)		
				Kg		Lbs		Kpa		Psi					D	B	
				S	D	S	D	S	D	S	D	S	D				
CN	11R22.5	8.25	16	3150	2900	6940	6390	850	850	123	123	148	145	13.5	L	1054	279

Plant	Size	Standard Rim(inch)	PR	Load				Pressure				Load Index	Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
				Kg		Lbs		Kpa		Psi					D	B
				S	D	S	D	S	D	S	D	S	D			
VN	385/55R22.5	12.25	20	4500		9920		900	130			160	14.5	K	996	386
CN/VN	385/65R22.5	11.75	20	4500		9920		900	130			160	17.5	K	1072	389
CN	385/65R22.5	11.75	24	5000		11000		900	130			164	17.5	K	1072	389



# AP125

# AP826



The RoadX AP125 is an all-position tire for trucks and busses driving in on and off-road applications.

**TIRE FEATURES:**


- Optimized pattern design provides exceptional braking and driving performance.
- The zigzag and large-angle groove design ensures good drainage and reduces stone retention.



The RoadX AP826 is an all-position tire for trucks traveling in on and off-road applications.

**TIRE FEATURES:**

- Main groove designs improves traction.
- Closed shoulder design and heat-resistant rubber compound improve overall durability.
- Groove edges and sipe design improve wet handling and skid resistance.

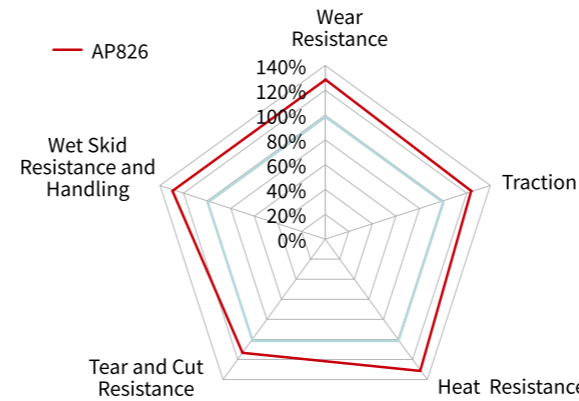

Plant	Size	Standard Rim(inch)	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
				Kg		Lbs		Kpa		Psi		S	D			D	B
				S	D	S	D	S	D	S	D						
VN	10.00R20	7.5	18	3250	3000	7160	6610	930	930	135	135	149	146	15	K	1054	278

Plant	Size	Standard Rim(inch)	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
				Kg		Lbs		Kpa		Psi		S	D			D	B
				S	D	S	D	S	D	S	D						
CN/VN	12.00R24	8.5	20	4500	4125	9920	9090	900	900	130	130	160	157	16	K	1238	315



# AP851

# AP856



The RoadX AP851 is an all-position tire for light trucks traveling in on and off-road applications.

**TIRE FEATURES:**

- Three main grooves improve directional stability, promote even tread wear, and offer better tire adaptability.
- Closed shoulder design effectively reduces irregular wear and improves overall wear resistance.
- Unique tread formula effectively improves puncture resistance.



The RoadX AP856 is an all-position tire designed for trucks driving in on and off-road applications.

**TIRE FEATURES:**

- Shoulder grooves and sipes improve heat dissipation, reduce shoulder rigidity, and promote even wear.
- Unique tread and shoulder groove designs improve grip and traction.
- Main grooves improve directional driving stability and promote even wear.
- Wear-resistant tread compound improves mileage.




Plant	Size	Standard Rim(inch)	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
				Kg		Lbs		Kpa		Psi		S	D			D	B
				S	D	S	D	S	D	S	D						
CN	215/75R17.5	6.00	16	2180	2060	4805	4540	860	860	125	125	135	133	13	L	773	211
CN	235/75R17.5	6.75	18	2725	2575	6005	5675	860	860	125	125	143	141	13	J	797	233

Plant	Size	Standard Rim(inch)	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
				Kg		Lbs		Kpa		Psi		S	D			D	B
				S	D	S	D	S	D	S	D						
CN/VN	11.00R20	8.0	18	3550	3250	7830	7160	930	930	135	135	152	149	15.5	K	1085	293
CN	11R22.5	8.25	16	3000	2725	6610	6005	830	830	120	120	146	143	16	L	1054	279
CN	12R22.5	9.00	18	3550	3250	7830	7160	930	930	135	135	152	149	18	K	1085	300



# AP861


# AP862



The RoadX AP861 is an all-position tire for trucks traveling in on and off-road applications.

**TIRE FEATURES:**

- Shallow shoulder grooves improve grip and wet skid resistance.
- Multi-layer shoulder design improves heat dissipation and durability.
- Tread compound improves cut and puncture resistance for greater adaptability between applications.
- Tire carcass design effectively promotes even shoulder wear.

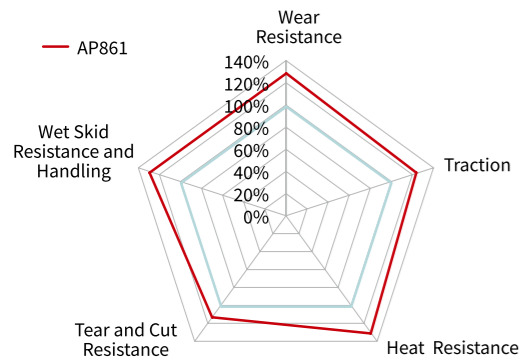

Plant	Size	Standard Rim(inch)	PR	Load				Pressure				Load Index	Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)		
				Kg		Lbs		Kpa		Psi					D	B	
				S	D	S	D	S	D	S	D						
CN/VN	325/95R24	9.00	22	4750	4500	10500	9920	850	850	125	125	162	160	15.5	K	1228	325



The RoadX AP862 is an all position tire for trucks running in on and off-road applications.

**TIRE FEATURES:**

- The shoulder design promotes even wear performance.
- The reinforced belt design improves tread rigidity, wear resistance and impact resistance on non-paved roads.
- Three zigzag patterns improve tire adaptability.



Plant	Size	Standard Rim(inch)	PR	Load				Pressure				Load Index	Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)		
				Kg		Lbs		Kpa		Psi					D	B	
				S	D	S	D	S	D	S	D						
CN	315/80R22.5	9	20	4000	3650	8820	8050	850	850	123	123	156	153	16.5	K	1076	312



# AP865



The RoadX AP865 is an all-position tire for trucks traveling in on and off-road applications.

**TIRE FEATURES:**

- Shoulder grooves improve heat dissipation to promote even wear.
- Small block sipes help to evenly distribute contact pressure for better grip.
- Ultra-wide running surface, shoulder design, and tread compound improve wear resistance.
- Groove nodules reduce stone retention.



Plant	Size	Standard Rim(inch)	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
				Kg		Lbs		Kpa		Psi		S	D			D	B
				S	D	S	D	S	D	S	D						
CN	7.50R16LT	6.00G	14	1500	1320	3305	2910	770	770	112	112	122	118	12.5	L	805	215
CN	8.25R16LT	6.50H	16	1800	1600	3970	3525	770	770	112	112	128	124	14	L	865	235
CN	8.25R20	6.50	16	2430	2300	5355	5070	930	930	135	135	139	137	13	K	974	236
CN	9.00R20	7.0	16	2800	2650	6175	5840	900	900	130	130	144	142	15	K	1019	259
CN	9.00R20	7.0	14	2575	2430	5675	5355	790	790	115	115	141	139	15	K	1019	259
CN	10.00R20	7.5	18	3250	3000	7160	6610	930	930	135	135	149	146	16	K	1054	278
CN/VN	11.00R20	8.0	18	3550	3250	7830	7160	930	930	135	135	152	149	16.5	K	1085	293
CN	11.00R20	8.0	16	3350	3075	7390	6780	830	830	120	120	150	147	16.5	K	1085	293
CN	11R22.5	8.25	16	3150	2900	6940	6395	850	850	123	123	148	145	16	M	1059	279
VN	12.00R20	8.5	18	3750	3450	8270	7610	830	830	120	120	154	151	17	K	1125	315
CN	12.00R24	8.5	20	4500	4125	9920	9090	900	900	130	130	160	157	14.5	K	1226	315
CN/VN	12.00R24	8.5	22	4750	4500	10500	9920	850	850	123	123	162	160	14.5	K	1238	315
CN/VN	12R22.5	9.00	18	3550	3250	7825	7165	930	930	135	135	152	149	18	K	1085	300
CN/VN	13R22.5	9.75	18	4000	3350	8820	7385	875	875	125	125	156	150	18	L	1124	320
CN/VN	315/80R22.5	9.00	20	4000	3650	8820	8050	850	850	125	125	156	153	17	K	1076	312



# AP866



The RoadX AP866 is an all-position tire for trucks traveling in on and off-road applications.

**TIRE FEATURES:**

- Large, deep shoulder grooves increase off-road traction.
- Unique tread grooves improve grip and traction as well as directional stability.
- Tread design promotes even tread wear.
- Wide running surface and specialized tread compound improve puncture and abrasion resistance.



Plant	Size	Standard Rim(inch)	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
				Kg		Lbs		Kpa		Psi		S	D			D	B
				S	D	S	D	S	D	S	D						
CN	6.50R16LT	"5.50F, 5 1/2J"	12	1060	925	2335	2040	670	670	97	97	110	105	10.5	K	750	185
CN/VN	7.00R16LT	5.50F	14	1320	1180	2910	2600	770	770	112	112	118	114	12.5	L	775	200
CN	7.00R16LT	5.50F	14	1320	1180	2910	2600	770	770	112	112	118	114	12.5	N	775	200
CN/VN	7.50R16LT	6.00G	14	1500	1320	3305	2910	770	770	112	112	122	118	12.5	L	805	215
CN/VN	8.25R16LT	6.50H	16	1800	1600	3970	3525	770	770	112	112	128	124	13.5	L	865	235
CN/VN	8.25R20	6.5	16	2430	2300	5355	5070	930	930	135	135	139	137	13	K	974	236

Plant	Size	Standard Rim(inch)	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
				Kg		Lbs		Kpa		Psi		S	D			D	B
				S	D	S	D	S	D	S	D						
CN	9.00R20	7.0	14	2575	2430	5675	5355	790	790	115	115	141	139	15	K	1019	259
CN/VN	9.00R20	7.0	16	2800	2650	6170	5840	900	900	130	130	144	142	15	K	1019	259
CN/VN	10.00R20	7.5	18	3250	3000	7160	6610	930	930	135	135	149	146	16	K	1054	278
CN	11.00R20	8.0	16	3350	3075	7390	6780	830	830	120	120	150	147	16.5	K	1085	293
CN	11.00R20	8.0	18	3550	3250	7830	7160	930	930	135	135	152	149	16.5	K	1085	293
CN/VN	11R22.5	8.25	16	3150	2900	6940	6395	850	850	123	123	148	145	16	M	1065	279
CN/VN	11R24.5	8.25	16	3250	3000	7160	6610	830	830	120	120	149	146	16	M	1104	279
CN	12.00R20	8.5	18	3750	3450	8270	7610	830	830	120	120	154	151	17	K	1125	315
VN	12.00R20	8.5	22	4250	3875	9370	8540	970	970	140	140	158	155	17	J	1125	315
CN/VN	12.00R24	8.5	20	4500	4125	9930	9090	900	900	130	130	160	157	14	K	1210	308
CN	12.00R24	8.5	18	4250	3875	9370	8540	830	830	120	120	158	155	14	K	1238	315
CN	12R22.5	9.00	18	3550	3250	7830	7160	930	930	135	135	152	149	16.5	K	1085	300
VN	13R22.5	9.75	18	3750	3350	8270	7390	850	850	125	125	154	150	16	L	1124	320
CN/VN	13R22.5	9.75	20	4000	3350	8820	7390	900	900	130	130	156	150	16	K	1124	320
CN	295/80R22.5	9.00	16	3550	3150	7830	6940	850	850	123	123	152	148	17.5	M	1044	298
CN	295/80R22.5	9.00	18	3550	3250	7830	7160	900	900	130	130	152	149	17.5	L	1044	298
VN	315/80R22.5	9.00	20	4125	3750	9090	8045	900	900	125	125	157	154	16	K	1076	312
CN/VN	315/80R22.5	9.00	20	4000	3650	8820	8045	850	850	125	125	156	153	16	K	1076	312



# AP866A

# AP867



The RoadX AP866A is an all-position tire for trucks traveling in on and off-road applications.

**TIRE FEATURES:**


- Large, deep shoulder grooves increase off-road traction.
- Unique tread grooves improve grip and traction as well as directional stability.
- Tread design promotes even tread wear.
- Wide running surface and specialized tread compound improve puncture and abrasion resistance.



The RoadX AP867 is an all-position tire for trucks traveling in on and off-road applications.

**TIRE FEATURES:**

- Large, deep shoulder grooves increase off-road traction.
- Unique tread grooves improve grip and traction as well as directional stability.
- Tread design promotes even tread wear.
- Wide running surface and specialized tread compound improve puncture and abrasion resistance.

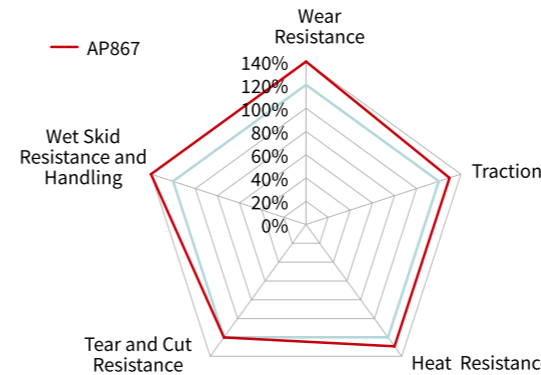

Plant	Size	Standard Rim(inch)	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
				Kg		Lbs		Kpa		Psi		S	D			D	B
				S	D	S	D	S	D	S	D						
CN	7.50R16LT	6.00G	14	1500	1320	3305	2910	770	770	112	112	122	118	11.5	L	805	215
CN	8.25R16LT	6.50H	16	1800	1600	3970	3525	770	770	112	112	128	124	12.5	L	865	235
CN/VN	11.00R20	8.0	18	3550	3250	7830	7160	930	930	135	135	152	149	16.5	K	1085	293
CN/VN	12.00R20	8.5	18	3750	3450	8270	7610	830	830	120	120	154	151	17	K	1125	315
VN	11R22.5	8.25	16	3150	2900	6940	6305	850	850	123	123	148	145	16	M	1065	279

Plant	Size	Standard Rim(inch)	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
				Kg		Lbs		Kpa		Psi		S	D			D	B
				S	D	S	D	S	D	S	D						
VN	11.00R20	8.0	18	3550	3250	7830	7160	930	930	135	135	152	149	17	K	1085	293
VN	295/80R22.5	9.00	18	3550	3250	7830	7160	900	900	130	130	152	149	16	L	1044	298



# AP868

# AP869



The RoadX AP868 is an all-position tire for trucks and busses traveling in on and off-road applications.

**TIRE FEATURES:**


- Wide tread and solid shoulder ribs deliver exceptional stability and promote even wear.
- Deep tread improves service life and traction.



The RoadX AP869 is an all-position tire for trucks driving in on and off-road applications.

**TIRE FEATURES:**

- Bead structure improves overall durability.
- Strengthened tread and tire structure improve overall safety.
- Large shoulder and deep groove design improve heat dissipation.
- Wide running surface and special tread compound improve wear and puncture resistance.
- Main groove design improves overall traction and grip.

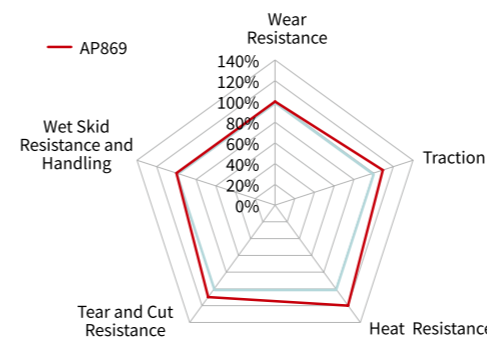

Plant	Size	Standard Rim(inch)	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
				Kg		Lbs		Kpa		Psi		S	D			D	B
				S	D	S	D	S	D	S	D						
CN/VN	11R22.5	8.25	16	3000	2725	6610	6005	830	830	120	120	146	143	18	K	1054	279
CN/VN	11R24.5	8.25	16	3250	3000	7160	6610	830	830	120	120	149	146	18	K	1104	279
CN/VN	255/70R22.5	7.50	16	2500	2300	5510	5070	830	830	120	120	140	137	17.5	L	930	255
CN	275/70R22.5	8.25	16	3150	2900	6940	6395	900	900	130	130	148	145	16.5	K	958	275
CN/VN	275/70R22.5	8.25	18	3150	2900	6940	6395	900	900	130	130	148	145	17	K	958	275
CN/VN	315/80R22.5	9.00	20	4625	4125	10200	9090	900	900	130	130	161	157	17	G	1076	312

Plant	Size	Standard Rim(inch)	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
				Kg		Lbs		Kpa		Psi		S	D			D	B
				S	D	S	D	S	D	S	D						
CN	11.00R20	8.00	18	3550	3250	7830	7160	930	930	135	135	152	149	16.5	K	1085	293
CN	12.00R24	8.5	20	4500	4125	9920	9090	900	900	130	130	160	157	16	K	1238	315
VN	255/70R22.5	7.5	16	2500	2300	5510	5070	830	830	120	120	140	137	16	L	930	255
CN	295/80R22.5	9.00	16	3550	3150	7830	6940	850	850	123	123	152	148	17	M	1044	298
CN	315/80R22.5	9.00	18	4000	3350	8820	7385	850	850	123	123	156(154)	150(150)	17	L(M)	1076	312
CN	315/80R22.5	9.00	20	4125	3750	9090	8270	900	900	130	130	157	154	17	K	1076	312



# AP886

# MS661



The RoadX AP886 is an all-position tire for trucks traveling in on and off-road applications.

**TIRE FEATURES:**

- Specialized groove design improves directional stability and skid resistance for various applications.
- Tread design and groove nodules reduce stone retention.
- Shoulder grooves improve heat dissipation.
- Fine tread grooves improve driving safety on wet roads.



The RoadX MS661 is a drive position tire for trucks traveling in on and off-road applications.

**TIRE FEATURES:**

- Large blocks are equipped with grooves that ensure greater traction on unpaved roads.
- Open shoulder design improves self-cleaning performance and traction.
- Connecting block ribs increase tread block rigidity to protect the grooves from tearing.
- Groove nodules located inside the groove and a puncture resistant tread compound effectively protects the tire from damage.



Plant	Size	Standard Rim(inch)	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
				Kg		Lbs		Kpa		Psi		S	D			D	B
				S	D	S	D	S	D	S	D						
CN	8.25R16LT	6.50H	16	1800	1600	3970	3525	770	770	112	112	128	124	14	K	865	235
CN	10.00R20	7.5	16	3000	2725	6610	6005	930	930	135	135	146	143	15.2	K	1054	278
CN	10.00R20	7.5	18	3250	3000	7160	6610	930	930	135	135	149	146	15.2	K	1054	278
CN	11.00R20	8.0	16	3350	3075	7390	6780	830	830	120	120	150	147	15.7	K	1085	293
CN	11.00R20	8.0	18	3550	3250	7830	7160	930	930	135	135	152	149	15.7	K	1085	293
CN	12.00R20	8.5	20	4000	3650	8820	8050	900	900	130	130	156	153	15.5	K	1125	315

Plant	Size	Standard Rim(inch)	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
				Kg		Lbs		Kpa		Psi		S	D			D	B
				S	D	S	D	S	D	S	D						
CN	11R22.5	8.25	16	3150	2900	6940	6395	850	850	123	123	148	145	19	J	1050	279
VN	12R22.5	9.00	18	3550	3250	7825	7165	930	930	135	135	152	149	20	K	1085	300
VN	13R22.5	9.75	20	4000	3350	8820	7390	900	900	130	130	156	150	22	J	1124	320
VN	13R22.5	9.75	18	3750	3450	8270	7610	830	830	120	120	154	151	22	K	1124	320
CN/VN	13R22.5	9.75	20	4000	3350	8820	7390	900	900	130	130	156	150	22	K	1124	320
CN	11R24.5	8.25	16	3250	3000	7160	6610	830	830	120	120	149	146	20.5	J	1104	279
VN	315/80R22.5	9.00	18	3750	3450	8270	7160	830	830	120	120	154	151	22	K	1076	312
CN/VN	315/80R22.5	9.00	20	4000	3650	8820	8045	850	850	125	125	156	153	22	K	1076	312



# MS662


# MS663



The RoadX MS662 is a drive position tire for trucks traveling in on and off-road applications.

**TIRE FEATURES:**


- Open shoulder design improves heat dissipation.
- Tread blocks offer exceptional traction and off-road performance.
- Deep grooves improve tire life and promote even wear.
- Sturdy carcass design improves load bearing capabilities.
- Groove nodules effectively reduce stone retention.

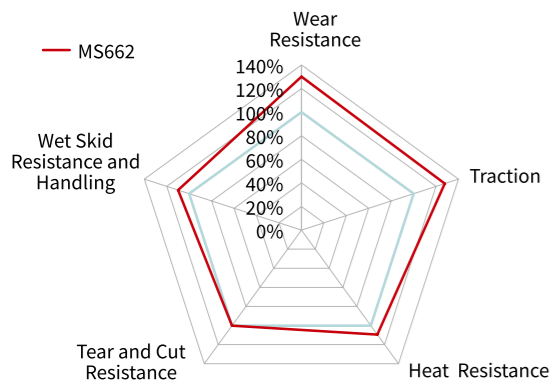

The RoadX MS663 is a drive position tire for trucks traveling in on and off-road applications.

**TIRE FEATURES:**

- Large tread blocks and central groove design improve traction in off-road applications.
- Open shoulder design improves self-cleaning performance.
- Deep tread and tire compound work to improve wear and tear resistance for overall improved mileage.
- Arced groove bottom and open shoulder design improve self-cleaning capabilities and reduce stone retention.

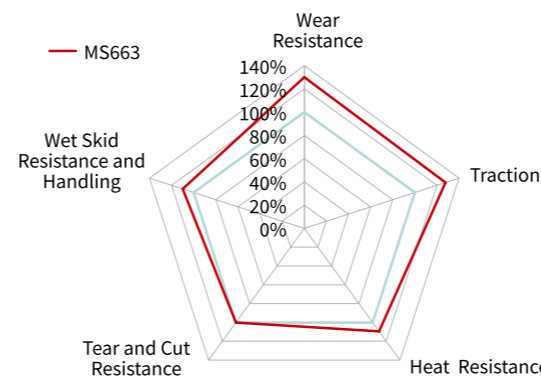

Plant	Size	Standard Rim(inch)	PR	Load				Pressure				Load Index	Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)			
				Kg		Lbs		Kpa		Psi					S	D	D	B
				S	D	S	D	S	D	S	D							
VN	11.00R20	8.0	18	3550	3250	7830	7160	930	930	135	135	152	149	18	K	1085	293	
VN	12.00R20	8.5	18	3750	3450	8270	7610	830	830	120	120	154	151	18	K	1125	315	

Plant	Size	Standard Rim(inch)	PR	Load				Pressure				Load Index	Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)			
				Kg		Lbs		Kpa		Psi					S	D	D	B
				S	D	S	D	S	D	S	D							
CN	295/80R22.5	9.00	18	3550	3250	7830	7160	900	900	130	130	152	149	18	K	1044	298	
VN	315/80R22.5	9.00	18	3750	3450	8270	7160	830	830	120	120	154	151	21	K	1076	312	
VN	315/80R22.5	9.00	20	4000	3650	8820	8045	850	850	125	125	156	153	21	K	1076	312	



# MS667


# MS668



The RoadX MS667 is a drive position tire for trucks traveling in on and off-road applications.

**TIRE FEATURES:**

- Deep tread pattern and tire compound improve wear and tear resistance effectively improving tire life.
- High-strength carcass improves overall load-bearing capabilities.
- Narrow groove design reduces tire rigidity and promotes even wear.
- Deep main grooves effectively improve grip and traction.
- Shoulder blocks connected by ribs to improve wear and tear resistance.

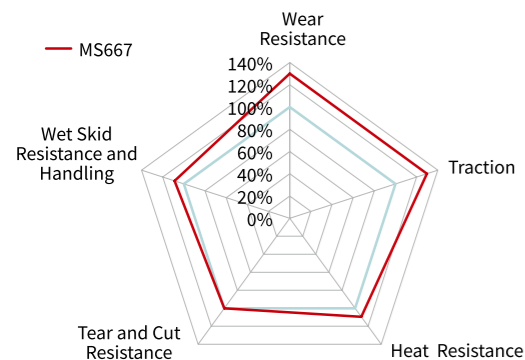

Plant	Size	Standard Rim(inch)	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
				Kg		Lbs		Kpa		Psi		S	D			D	B
				S	D	S	D	S	D	S	D						
VN	13R22.5	9.75	18	4000	3350	8820	7385	875	875	125	125	156	150	20	K	1124	320



The RoadX MS668 is a drive position tire for trucks driving in on and off-road applications.

**TIRE FEATURES:**

- Groove designs on the pattern blocks reduce hardness and increase wet grip.
- The deep groove design extending from the shoulder to the center provides excellent traction.
- Ribs connect shoulder blocks to improve tear resistance and promote even wear.
- Shallow groove design on the side of the blocks effectively promote even wear.
- The wide running surface and deep pattern effectively increase wear resistance of the tread and improve mileage.



Plant	Size	Standard Rim(inch)	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
				Kg		Lbs		Kpa		Psi		S	D			D	B
				S	D	S	D	S	D	S	D						
CN	7.00R16LT	5.50F	14	1320	1180	2910	2600	770	770	112	112	118	114	13.5	K	775	200
CN	7.50R16LT	6.00G	14	1500	1320	3305	2910	770	770	112	112	122	118	14.5	K	805	215
CN	8.25R16LT	6.50H	16	1800	1600	3970	3525	770	770	112	112	128	124	15.5	K	855	235
CN	8.25R20	6.5	16	2430	2300	5355	5070	930	930	135	135	139	137	16.5	K	974	236
CN	9.00R20	7.0	16	2800	2650	6175	5840	900	900	130	130	144	142	17.5	K	1019	259
CN	10.00R20	7.5	18	3250	3000	7160	6610	930	930	135	135	149	146	18	K	1054	278
CN	11.00R20	8.0	18	3550	3250	7830	7160	930	930	135	135	152	149	19.5	K	1085	293
CN	12.00R20	8.5	18	3750	3450	8270	7610	830	830	120	120	154	151	20	K	1125	315
CN	12.00R20	8.5	22	4250	3875	9370	8540	970	970	140	140	158	155	20	J	1125	315



# MS669

# MS676



The RoadX MS669 is a drive position tire for trucks traveling in on and off-road applications.

**TIRE FEATURES:**

- Horizontal block pattern effectively improves grip and traction.
- Large blocks and zig-zagged groove design ensure a strong traction in off-road conditions.
- A deep tread that also bolsters improved wear and tear resistance to effectively improve mileage.
- Strong carcass designed improves load-bearing capabilities.
- Sturdy tread blocks and improved groove angle are designed to effectively reduce stone retention and protect the tire from puncture damage.



The RoadX MS676 is a drive position tire for trucks traveling in on and off-road applications.

**TIRE FEATURES:**

- Directional pattern design offers excellent traction in wet and muddy road conditions.
- Reinforced shoulder ribs improve block strength and promote even wear.
- Deep tread pattern and tire compound help to extend the tire's service life.



Plant	Size	Standard Rim(inch)	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
				Kg		Lbs		Kpa		Psi		S	D			D	B
				S	D	S	D	S	D	S	D						
CN	315/80R22.5	9.00	18	3750	3450	8270	7160	830	830	120	120	154	151	18.5	K	1076	312
CN	315/80R22.5	9.00	20	4000	3650	8820	8045	850	850	125	125	156	153	18.5	K	1076	312

Plant	Size	Standard Rim(inch)	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
				Kg		Lbs		Kpa		Psi		S	D			D	B
				S	D	S	D	S	D	S	D						
CN	13R22.5	9.75	18	3750	3450	8270	7610	830	830	120	120	154	151	21.5	K	1124	320
CN	13R22.5	9.75	20	4000	3350	8820	7385	875	875	125	125	156	150	21.5	G	1124	320
CN	315/80R22.5	9.00	20	4000	3650	8820	8045	850	850	125	125	156	153	22	K	1076	312



# MS678

# MS680



The RoadX MS678 is a drive position tire for trucks traveling in on and off-road applications.

**TIRE FEATURES:**

- Wide running surface and tread groove design improve traction and grip.
- Deep grooves improve driving safety.
- Groove nodules effectively reduce stone retention.
- Strengthened structure design improves load bearing capacity.
- Open shoulder design and rubber compound effectively dissipate heat.



The RoadX MS680 is a drive position tire for trucks traveling in on and off-road applications.

**TIRE FEATURES:**

- Open shoulder design improves heat dissipation.
- Pattern block design effectively improves traction in off-road applications.
- Deep grooves and tire compound help to extend the tire's service life.



Plant	Size	Standard Rim(inch)	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
				Kg		Lbs		Kpa		Psi		S	D			D	B
				S	D	S	D	S	D	S	D						
CN	12.00R20	8.5	20	4000	3650	8820	8050	900	900	130	130	156	153	21	J	1125	315

Plant	Size	Standard Rim(inch)	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
				Kg		Lbs		Kpa		Psi		S	D			D	B
				S	D	S	D	S	D	S	D						
VN	11.00R20	8.0	18	3550	3250	7830	7160	930	930	135	135	152	149	20	K	1085	293
VN	12.00R20	8.5	18	3750	3450	8270	7610	830	830	120	120	154	151	21	K	1125	315



# MS688

# MS689



The RoadX MS688 is a drive position tire for trucks traveling in on and off-road applications.

**TIRE FEATURES:**

- Tread groove and sipe design offer exceptional wet skid resistance.
- Large central tread blocks effectively improve impact resistance.
- Groove design improves heat dissipation and reduces stone retention.
- Strengthened structure design improves load bearing capacity.



The RoadX MS689 is a drive position tire for trucks driving in on and off-road applications.

**TIRE FEATURES:**

- Rubber nodules at the bottom of the groove effectively reduce stone retention for improved driving safety.
- Wide and deep tread pattern effectively improves tire usage life.



Plant	Size	Standard Rim(inch)	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
				Kg		Lbs		Kpa		Psi		S	D			D	B
				S	D	S	D	S	D	S	D						
CN	12R22.5	9.00	18PR	3550	3250	7830	7160	930	930	135	135	152	149	18	K	1085	300
CN	10.00R20	7.5	18	3250	3000	7160	6610	930	930	135	135	149	146	18	K	1054	278
CN	11.00R20	8.0	16	3350	3075	7390	6780	830	830	120	120	150	147	18	K	1085	293
CN	11.00R20	8.0	18	3550	3250	7830	7160	930	930	135	135	152	149	18	K	1085	293
CN	12.00R20	8.5	20	4000	3650	8820	8050	900	900	130	130	156	153	18	K	1125	315
VN	325/95R24	9.0	22	4750	4500	10500	9920	850	850	125	125	162	160	20	K	1228	325

Plant	Size	Standard Rim(inch)	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
				Kg		Lbs		Kpa		Psi		S	D			D	B
				S	D	S	D	S	D	S	D						
CN	12R22.5	9.00	18	3550	3250	7830	7160	930	930	135	135	152	149	22	K	1124	300



# DT890

# DT992



The RoadX DT890 is a drive position tire for trucks traveling in on and off-road applications.

**TIRE FEATURES:**

- Extra deep 31/32" tread depth and unique tread block design offer superior on and off-road traction and excellent tread life.
- Specialized rubber compound is designed specifically for demanding off-road applications and improves cut, puncture and chunking resistance.
- Tread grooves feature "stone ejectors" that effectively reduce stone retention.



The RoadX DT992 is a drive position tire for trucks driving in on and off-road applications.

**TIRE FEATURES:**

- Small block grooves reduce block hardness and increase grip on wet road surfaces.
- Main groove designs improve overall grip.
- Shoulder blocks are connected to ribs that help improve tear resistance and promote even wear.
- Wide running surface and deep tread effectively increase tread wear resistance and tire mileage.



Plant	Size	Standard Rim(inch)	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
				Kg		Lbs		Kpa		Psi		S	D			D	B
				S	D	S	D	S	D	S	D						
CN/VN	11R22.5	8.25	16	3000	2725	6610	6005	830	830	120	120	146	143	25	K	1065	279
CN/VN	11R24.5	8.25	16	3250	3000	7160	6610	830	830	120	120	149	146	25	K	1116	279

Plant	Size	Standard Rim(inch)	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
				Kg		Lbs		Kpa		Psi		S	D			D	B
				S	D	S	D	S	D	S	D						
VN	7.00R16LT	5.50F	14	1320	1180	2910	2600	770	770	112	112	118	114	14	L	775	200
CN/VN	7.50R16LT	6.00G	14	1500	1320	3310	2910	770	770	112	112	122	118	15.5	L	805	215
CN/VN	8.25R16LT	6.50H	16	1800	1600	3970	3530	770	770	112	112	128	124	15.5	L	865	235
CN	9.5R17.5	6.75	18	2725	2575	6005	5675	875	875	125	125	143	141	17	K	842	240
CN/VN	8.25R20	6.5	16	2430	2300	5360	5070	930	930	135	135	139	137	17	K	974	236
CN/VN	9.00R20	7.0	16	2800	2650	6170	5840	900	900	130	130	144	142	18	K	1019	259
CN	10.00R20	7.5	18	3250	3000	7160	6610	930	930	135	135	149	146	19	K	1054	278
CN	11.00R20	8.0	16	3350	3075	7390	6780	830	830	120	120	150	147	20	K	1085	293
CN/VN	11.00R20	8.0	18	3550	3250	7830	7160	930	930	135	135	152	149	20	K	1085	293
VN	12.00R20	8.5	18	3750	3450	8270	7610	830	830	120	120	154	151	20	K	1125	315
CN	12R22.5	9.00	18	3550	3250	7830	7160	930	930	135	135	152	149	24	G	1096	300
CN/VN	12.00R24	8.5	20	4500	4125	9920	9090	900	900	130	130	160	157	20	K	1238	315
CN	265/70R19.5	7.50	18	2725	2575	6005	5675	900	900	130	130	143	141	15.5	K	867	262



# DX770

# DX771



The RoadX DX770 is an all-position super single tire for trucks driving in on and off-road applications.

**TIRE FEATURES:**

- Four belt structure improve superior shock and puncture resistance.
- Aggressive tread design provides excellent on and off-road traction.
- Main grooves enhance wet traction.
- Central groove nodules reduce stone retention.



The RoadX DX771 is a trailer position tire for trucks traveling in on and off-road applications.

**TIRE FEATURES:**

- The strengthened shoulder ribs and interconnected grooves improve durability and promote even wear.
- The unique groove design and rubber nodules reduce stone retention, ensure driving stability and improves the tire's self-cleaning capabilities.
- Tough tread compound effectively improves puncture and scratch resistance for use in on and off-road applications.
- Tread pattern grooves are designed to improve wet grip and handling.



Plant	Size	Standard Rim(inch)	PR	Load				Pressure				Load Index	Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
				Kg		Lbs		Kpa		Psi					D	B
				S	D	S	D	S	D	S	D					
CN/VN	385/65R22.5	11.75	18	4250	9370	830	120	158	16.5	K	1072	389				
CN/VN	385/65R22.5	11.75	20	4500	9920	900	130	160	16.5	K	1072	389				
CN	425/65R22.5	12.25	20	5150	11400	830	120	165	17.5	K	1124	422				

Plant	Size	Standard Rim(inch)	PR	Load				Pressure				Load Index	Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
				Kg		Lbs		Kpa		Psi					D	B
				S	D	S	D	S	D	S	D					
CN	425/65R22.5	12.25	20	5150	11400	830	120	165	17.5	K	1124	422				



# DX775


# DX776



The RoadX DX775 is a trailer position tire for trucks driving in on and off-road application.

**TIRE FEATURES:**

- Deep tread pattern effectively improves wear resistance.
- Strengthened tread and structure improve overall safety.
- Deep grooves and groove design improve grip.
- Wide driving surface and tread compound effectively improve wear resistance.
- Groove nodules effectively reduce stone retention.

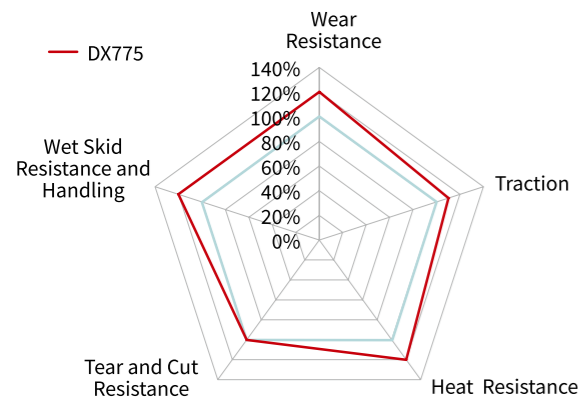


Plant	Size	Standard Rim (inch)	PR	Load				Pressure				Load Index	Tread Depth (mm)	Speed Grade	Inflated Tire Dimension (mm)	
				Kg		Lbs		Kpa		Psi					D	B
				S	D	S	D	S	D	S	D	S	D			
CN/VN	445/65R22.5	13.00	20	5600	12300	830	120	168	16.5	K	1150	444				



The RoadX DX776 is a steer and trailer position tire for trucks traveling in on and off-road applications.

**TIRE FEATURES:**

- Wide-based tire can replace original double tire usage.
- Deep tread pattern effectively increases tread wear resistance.
- High-strength crown and carcass design improve driving safety.
- Tread block and groove design improve shock absorption and grip.
- Ultra-wide running surface and tread compound significantly improve wear resistance.

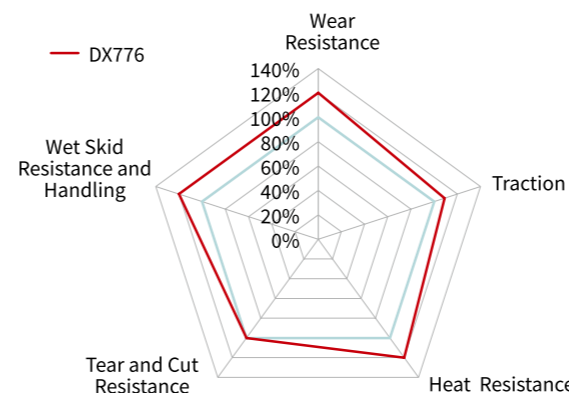

Plant	Size	Standard Rim (inch)	PR	Load				Pressure				Load Index	Tread Depth (mm)	Speed Grade	Inflated Tire Dimension (mm)	
				Kg		Lbs		Kpa		Psi					D	B
				S	D	S	D	S	D	S	D	S	D			
VN	385/65R22.5	11.75	20	4500	9920	900	130	160	15.5	K	1072	389				
CN	425/65R22.5	12.25	20	5150	11400	830	120	165	17.5	K	1124	422				



# DT980

# DT989



The RoadX DT980 is a drive position tire for trucks driving in off-road applications.

**TIRE FEATURES:**

- Large tread blocks effectively improve puncture and cut resistance.
- Central tread grooves help to effectively improve impact resistance, traction, and braking.
- Step-like grooves and groove nodules improve puncture resistance.
- Enhanced tire structure increases load bearing capabilities.
- Tread compound effectively reduces heat buildup to extend tread life.



The RoadX DT989 is a drive position tire for trucks traveling in severe service applications.

**TIRE FEATURES:**

- Large lug design effectively improves the tire's puncture, cut, and chunking resistance.
- The central, interconnected rib offers exceptional durability for severe service applications.
- Tread grooves feature "stone ejectors" that effectively reduce stone retention.



Plant	Size	Standard Rim(inch)	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
				Kg		Lbs		Kpa		Psi		S	D			D	B
				S	D	S	D	S	D	S	D						
CN	12.00R20	8.5	20	4000	3650	8820	8050	900	900	130	130	156	153	25	F	1125	315

Plant	Size	Standard Rim(inch)	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
				Kg		Lbs		Kpa		Psi		S	D			D	B
				S	D	S	D	S	D	S	D						
CN	10.00R20	7.5	18	3250	3000	7160	6610	930	930	135	135	149	146	22	F	1054	278
CN	11.00R20	8.0	16	3350	3075	7390	6780	830	830	120	120	150	147	23	F	1085	293
CN	11.00R20	8.0	18	3550	3250	7830	7160	930	930	135	135	152	149	23	F	1085	293
CN	12.00R20	8.5	20	4000	3650	8820	8050	900	900	130	130	156	153	23.5	F	1125	315



# DT990



**A:** The RoadX DT990 is a drive position tire for trucks traveling in severe service applications.

**TIRE FEATURES:**

- Aggressive multi-lug design offers exceptional off-road traction.
- Deep 31/32" tread depth improves tire life and offers exceptional cost per kilometer.
- Enhanced rubber compound improves cut and chunking resistance.
- Open shoulder design improves self-cleaning capabilities and improves off-road grip and traction.



**B:** The RoadX DT990 is a drive position tire for trucks traveling in severe service applications.

**TIRE FEATURES:**

- Tread compound improves cut resistance and reduces block drop-off.
- Deep interconnected grooves improve traction.
- Tread compound and block design improve cut resistance and the occurrence of block drop-off
- Open shoulder design effectively disperses heat.



**A**

Plant	Size	Standard Rim(Inch)	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
				Kg		Lbs		Kpa		Psi		S	D			D	B
				S	D	S	D	S	D	S	D						
CN/VN	11R22.5	8.25	16	3000	2725	6610	6005	830	830	120	120	146	143	24	G	1054	279
CN/VN	11R22.5	8.25	16	3150	2900	6940	6390	850	850	123	123	148	145	24	G	1065	279
CN/VN	12R22.5	9.00	16	3350	3075	7390	6780	830	830	120	120	150	147	23.5	G	1096	300
VN	12R22.5	9.00	16	3550	3150	7830	6940	850	850	123	123	152	148	23.5	G	1085	300
CN/VN	12R22.5	9.00	18	3550	3250	7830	7160	930	930	135	135	152	149	23.5	G	1096	300
CN/VN	13R22.5	9.75	18	4000	3350	8820	7385	875	875	125	125	156	150	23.5	G	1124	320
CN	13R22.5	9.75	18	4000	3350	8820	7385	875	875	125	125	156	150	23.5	K	1124	320
CN/VN	11R24.5	8.25	16	3250	3000	7160	6610	830	830	120	120	149	146	24	G	1116	279
CN	12.00R20	8.5	22	4250	3875	9370	8540	970	970	140	140	158	155	23.5	F	1136	315
CN	235/75R17.5	6.75	16	2725	2575	6005	5675	860	860	125	125	143	141	17	G	797	233
CN	235/75R17.5	6.75	18	2725	2575	6005	5675	860	860	125	125	143	141	17	G	797	233
CN	295/80R22.5	9.00	16	3550	3150	7830	6940	850	850	123	123	152	148	23.5	J	1044	298
CN/VN	295/80R22.5	9.00	18	3550	3250	7830	7160	900	900	130	130	152	149	23.5	J	1044	298
VN	315/80R22.5	9.00	18	4000	3350	8820	7385	850	850	123	123	156(154)	150(150)	23.5	G(J)	1076	312
VN	315/80R22.5	9.00	20	4125	3750	9090	8270	900	900	130	130	157	154	23.5	G	1076	312

**B**

Plant	Size	Standard Rim(Inch)	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
				Kg		Lbs		Kpa		Psi		S	D			D	B
				S	D	S	D	S	D	S	D						
CN	12.00R24	8.5	20	4500	4125	9920	9090	900	900	130	130	160	157	31	D	1238	315
CN	12.00R24	8.5	20	4500	4125	9920	9090	900	900	130	130	160	157	31	F	1238	315



# DT991


# DT993



The RoadX DT991 is a drive position tire for trucks driving in off-road applications.

**TIRE FEATURES:**


- Large blocks improve traction.
- Wide running surface and deepened grooves improve mileage and promote even wear.
- Tread compound improves puncture and tear resistance.

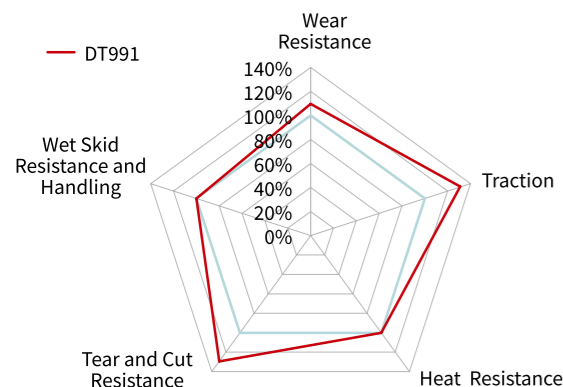

The RoadX DT993 is a drive position tire for trucks traveling in severe service applications.

**TIRE FEATURES:**

- Wide running surface and deepened tread design improves overall traction.
- Strengthened shoulder rib improves block stability.
- High-strength belt design improves the crown's impact resistance.
- Tread compound improves cut and block drop-off resistance.

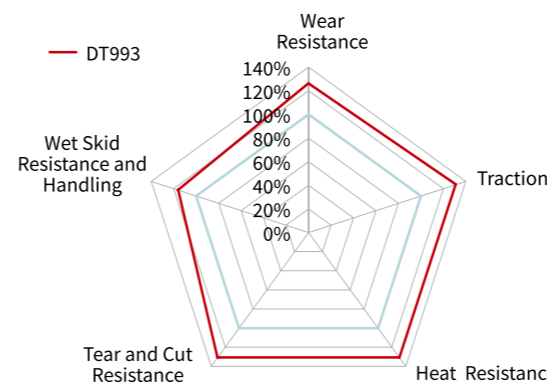

Plant	Size	Standard Rim(inch)	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
				Kg		Lbs		Kpa		Psi		S	D			D	B
				S	D	S	D	S	D	S	D						
VN	12.00R20	8.5	18	3750	3450	8270	7610	830	830	120	120	154	151	24	D	1125	315

Plant	Size	Standard Rim(inch)	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
				Kg		Lbs		Kpa		Psi		S	D			D	B
				S	D	S	D	S	D	S	D						
VN	11.00R20	8.0	18	3550	3250	7830	7160	930	930	135	135	152	149	21	K	1085	293



# DT997


# DT998



The RoadX DT997 is a drive position tire for trucks driving in off-road applications.

**TIRE FEATURES:**

- Large tread blocks and deep grooves improve off-road traction and braking performance.
- Open shoulder design improves self-cleaning capabilities.
- Central connecting rib increases block rigidity and improves tear resistance.

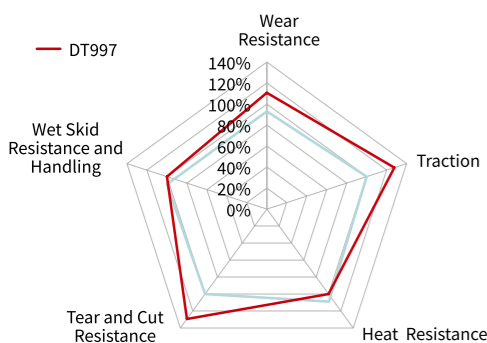

The RoadX DT998 is an all-position tire for trucks driving in off-road applications.

**TIRE FEATURES:**

- New tread design improves overall traction.
- Center rib design improves toughness and improves tear resistance.
- Open shoulder design improves traction and braking performance in off-road applications.
- Groove design effectively reduces stone retention.
- Tread compound improves puncture resistance.



Plant	Size	Standard Rim(inch)	PR	Load				Pressure				Load Index	Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)		
				Kg		Lbs		Kpa		Psi					D	B	
				S	D	S	D	S	D	S	D	S	D				
CN	7.50R16LT	6.00G	14	1500	1320	3305	2910	770	770	112	112	122	118	14.5	G	805	215
CN	8.25R16LT	6.50H	16	1800	1600	3970	3525	770	770	112	112	128	124	15.5	G	855	235
CN	10.00R20	7.5	18	3250	3000	7160	6610	930	930	135	135	149	146	23	F	1054	278
CN	11.00R20	8.0	16	3350	3075	7390	6780	830	830	120	120	150	147	23.5	F	1085	293
CN	11.00R20	8.0	18	3550	3250	7830	7160	930	930	135	135	152	149	23.5	F	1085	293
CN/VN	12.00R20	8.5	18	3750	3450	8270	7610	830	830	120	120	154	151	23.5	F	1125	315
CN	12.00R20	8.5	22	4250	3875	9370	8540	970	970	140	140	158	155	23.5	F	1136	315

Plant	Size	Standard Rim(inch)	PR	Load				Pressure				Load Index	Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)		
				Kg		Lbs		Kpa		Psi					D	B	
				S	D	S	D	S	D	S	D	S	D				
CN	7.50R16LT	6.00G	14	1500	1320	3305	2910	770	770	112	112	122	118	14.5	G	805	215
CN	7.50R16LT	6.00G	16	1650	1450	3640	3195	870	870	126	126	125	121	14.5	G	805	215
CN	10.00R20	7.5	18	3250	3000	7160	6610	930	930	135	135	149	146	23.5	F	1054	278
VN	11.00R20	8.0	18	3550	3250	7830	7160	930	930	135	135	152	149	24.5	F	1085	293
VN	12.00R20	8.5	22	4250	3875	9370	8540	970	970	140	140	158	155	24.5	F	1125	315
VN	12.00R20	8.5	18	3750	3450	8270	7610	830	830	120	120	154	151	24.5	F	1125	315



**OFF ROAD**

**ROADX  
TIRE**

# DT999



The RoadX DT999 is an all-position tire for trucks traveling in off-road applications.

**TIRE FEATURES:**

- Open shoulder design improves grip and traction in off-road applications.
- Ribs between the tread block pattern effectively improve durability and tear resistance.



Plant	Size	Standard Rim(inch)	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
				Kg		Lbs		Kpa		Psi		S	D			D	B
				S	D	S	D	S	D	S	D						
CN	11R22.5	8.25	16	3000	2725	6610	6005	830	830	123	123	146	143	24	G	1065	279
CN/VN	12R22.5	9.00	18	3550	3250	7830	7160	930	930	135	135	152	149	24	G	1085	300
CN	295/80R22.5	9.00	18	3550	3250	7830	7160	900	900	130	130	152	149	23.5	J	1044	298



# RU650

# RU651



The RoadX RU650 is an all-position tire for busses traveling in urban applications.

**TIRE FEATURES:**


- Optimized ECO profile reduces rolling resistance for improved fuel economy.
- Tread pattern design improves wet skid resistance and driving safety.
- Tire tread compound improves wear and tear resistance.
- Tread pattern effectively reduces noise emissions.
- Strengthened inner-liner improves durability.
- High-strength carcass and enhance belt design improve driving safety.



The RoadX RU651 is an all-position tire for busses driving in urban applications.

**TIRE FEATURES:**

- Sidewall protector improves kerbing resistance.
- Sipe design effectively increases ground contact area for improved grip and skid-resistance.
- Shoulder groove design improves heat dissipation.
- Optimized tread pattern design effectively reduces noise emissions.
- Deep tread groove improves service life.

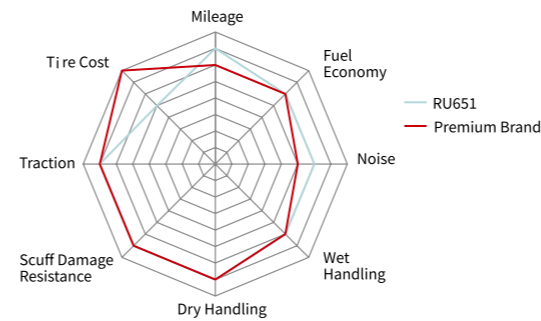

Plant	Size	Standard Rim(inch)	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
				Kg		Lbs		Kpa		Psi		S	D			D	B
				S	D	S	D	S	D	S	D						
CN	10R22.5	7.50	16	2800	2650	6175	5840	900	900	130	130	144	142	16.5	L	1019	254
CN	275/70R22.5	8.25	18	3150	2900	6940	6395	900	900	130	130	148	145	20	J	958	275
CN/VN	275/70R22.5	8.25	16	3150	2900	6940	6395	900	900	130	130	148(152)	145(148)	20.5	J(E)	958	275
CN/VN	275/70R22.5	8.25	16	3150	2900	6940	6395	900	900	130	130	148(152)	145(148)	20.5	J(F)	958	275

Plant	Size	Standard Rim(inch)	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
				Kg		Lbs		Kpa		Psi		S	D			D	B
				S	D	S	D	S	D	S	D						
CN	11R22.5	8.25	16	3150	2900	6940	6395	850	850	123	123	148	145	20	J	1065	279



# WP806

# WD703



The RoadX WP806 is an all-position tire for trucks traveling in winter applications.

**TIRE FEATURES:**

- Wide tread width and main groove design improve overall contact area and grip.
- M+S and 3PMSF identification represent the tire's excellent winter performance.
- Unique sipe pattern and open shoulder design effectively drain water and snow.



The RoadX WD703 is a drive position tire for trucks traveling in winter applications.

**TIRE FEATURES:**

- Multi-block grooves and sipe design increase tread contact area for improved performance on on ice and snow.



Plant	Size	Standard Rim(inch)	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
				Kg		Lbs		Kpa		Psi		S	D			D	B
				S	D	S	D	S	D	S	D						
VN	295/80R22.5	9.00	18	3750	3250	8270	7160	850	850	123	123	154	149	16.5	L	1044	298
VN	315/70R22.5	9.00	16	3550	3150	7830	6940	900	900	130	130	152	148	16	L	1014	312
VN	315/70R22.5	9.00	18	3750	3350	8270	7390	900	900	130	130	154	150	16	L	1014	312
VN	315/80R22.5	9.00	18	4000	3350	8820	7385	850	850	123	123	156	150	16.5	L	1076	312
VN	385/55R22.5	12.25	20	4500		9920		900		130		160		14.5	K	996	385
VN	385/65R22.5	11.75	20	4500		9920		900		130		160		15	K	1072	389

Plant	Size	Standard Rim(inch)	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
				Kg		Lbs		Kpa		Psi		S	D			D	B
				S	D	S	D	S	D	S	D						
VN	295/80R22.5	9.00	18	3750	3250	8270	7160	850	850	123	123	154	149	21	L	1044	298
VN	315/70R22.5	9.00	16	3550	3150	7830	6940	900	900	130	130	152	148	21	L	1014	312
VN	315/70R22.5	9.00	18	3750	3350	8270	7390	900	900	130	130	154	150	21	L	1014	312
VN	315/80R22.5	9.00	18	4000	3350	8820	7385	850	850	123	123	156	150	21	L	1076	312



**WINTER**

**ROADX  
TIRE**

# RD798



The RoadX RD798 is a drive position tire for trucks traveling in winter applications.

**TIRE FEATURES:**

- 3 Peak Mount Snowflake (3PMS) certified tire designed to handle rigorous cold weather applications.
- Open tread block design and lateral sipes increase traction on mud, snow, and ice.
- Deep 27/32" grooves improve service life.



Plant	Size	Standard Rim(inch)	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
				Kg		Lbs		Kpa		Psi		S	D			D	B
				S	D	S	D	S	D	S	D						
CN/VN	11R22.5	8.25	16	3000	2725	6610	6005	830	830	120	120	146	143	21.5	L	1065	279
CN/VN	11R22.5	8.25	14	2800	2650	6175	5840	720	720	105	105	144	142	21.5	L	1065	279
CN/VN	11R24.5	8.25	16	3250	3000	7160	6610	830	830	120	120	149	146	21.5	L	1104	279
CN/VN	11R24.5	8.25	14	3000	2725	6610	6005	720	720	105	105	146	143	21.5	L	1104	279